




Z1172-167

SIZE 900 LARGE CAPACITY GREASE INTERCEPTOR WITH EXTENSION AND 2 [51]X1/4 [6] FLANGE

SPECIFICATION SHEET

TAG _____

Dimensional Data (inches and [mm]) are Subject to Manufacturing Tolerances and Change Without Notice

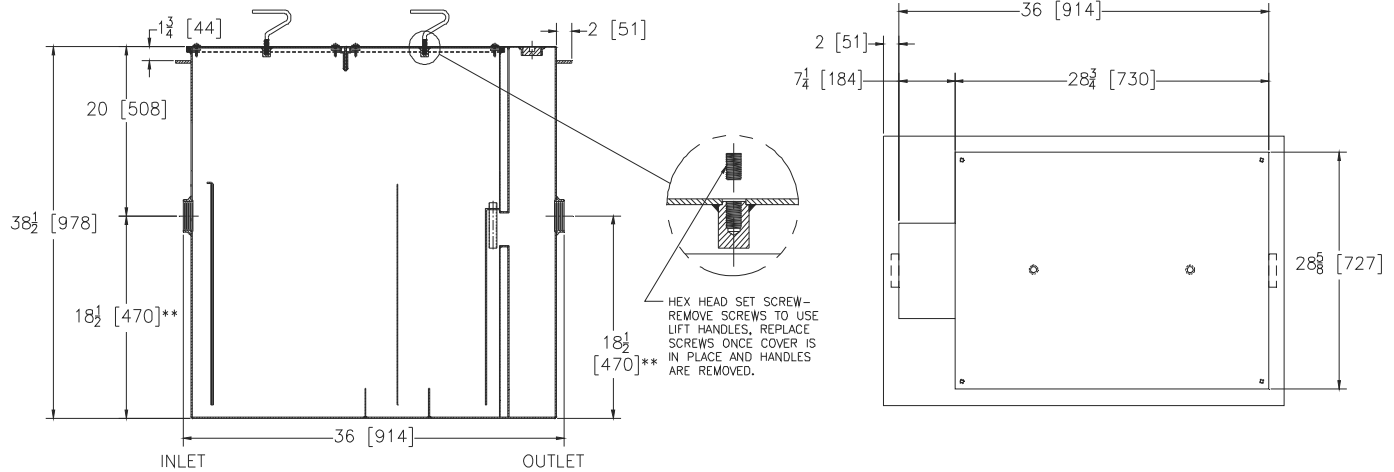

** Location of inlet must be maintained at the '18-1/2 [470]' dimension listed for size.

Size	Inlet/ Outlet Size	Flow Rate G.P.M. [L]	Water Gal. [L]	Grease Lbs. [kg]	No. of Covers	Approx. Empty Wt Lbs. [kg] without Extension
900	3 [76]	75 [284]	65 [246]	150 [68]	1	316 [143]

ENGINEERING SPECIFICATION: ZURNZ1172-167

Large capacity Acid Resistant Coated interior and exterior fabricated steel grease interceptor, rated at 75 GPM and 150 Lbs. grease capacity, with internal air relief by-pass, bronze cleanout plug and visible double wall trap seal with removable pressure equalizing/flow diffusing baffle. Gasketed non-skid secured cover with removable lift handles, complete with flow control fitting. Acid resistant coated interior and exterior fabricated steel extension section built integral to the interceptor body, and 2 [51] x 1/4 [6] flange. Regularly furnished with inlet and outlet in high position.

OPTIONS (Check/specify appropriate options)

PREFIXES

- ___ Z Acid Resistant Coated Fabricated Steel*
- ___ ZS All Type 304 Fabricated Stainless Steel

SUFFIXES

- ___ -AL Aluminum Cover
- ___ -HD Heavy-Duty Traffic Cover Rated at 10,000 lbs [4536kg.] Maximum Safe Live Load.
- ___ -L Angle Type (Z1108-L) Flow Control Device

*REGULARLY FURNISHED UNLESS OTHERWISE SPECIFIED

REV.	DATE: 09/12/13	C.N. NO. 129923
PROD./DWG. NO. Z1172-167		