




Z504-81

12 [305] HEAVY-DUTY DRAIN W/ GREY ACID RESISTING COATED
CAST IRON & STAINLESS STEEL VENEER FRAME & GRATE

TAG _____

Dimensional Data (inches and [mm]) are Subject to Manufacturing Tolerances and Change Without Notice

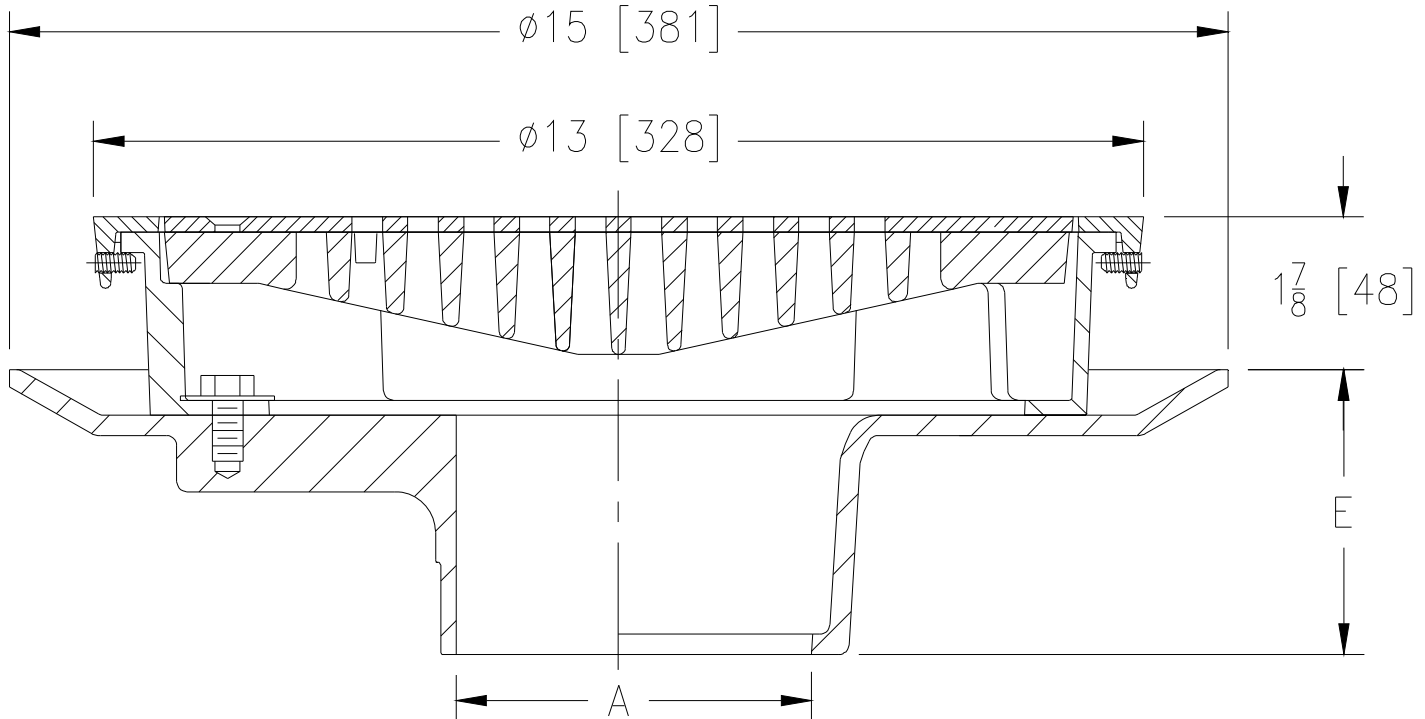

A- Pipe Size In.	Approx. Wt. Lbs. [kg]	Grate Open Area Sq. In. [cm ²]
3-4-6 [76-102-152]	32 [15]	30 [194]

ENGINEERING SPECIFICATION: ZURN Z504-81

12 [305] Diameter top drain grey acid resisting epoxy coated cast iron body with bottom outlet, seepage pan and combination membrane flashing clamp, frame for heavy-duty slotted grate and stainless steel veneer frame and grate.

OPTIONS (Check/specify appropriate options)

PIPE SIZE

- 3-4-6 [76-102-152]
- 3-4-6 [76-102-152]
- 3-4-6 [76-102-152]
- 3-4-6 [76-102-152]
- 3-4 [76-102]

(Specify size/type) OUTLET

- ___ IC Inside Caulk
- ___ IG Inside Gasket
- ___ IP Threaded
- ___ NH No-Hub
- ___ NL Neo-Loc

'E' BODY HT. DIM.

- 3-1/2 [89]
- 3-1/2 [89]
- 3-1/2 [89]
- 3-1/2 [89]
- 2-5/8 [67]

PREFIXES

- ___ ZS A.R.C. Cast Iron Body w/ Stainless Steel Veneer Frame & Grate

SUFFIXES

- | | |
|---|---|
| ___ -DG Duresist Grate | ___ -T Square Top (Add 5/16 [8] to 1-7/8 [48] Dim.) |
| ___ -F Extension Frame
(Specify Total Height Req'd.) | ___ -TC Neo-Loc Test Cap Gasket
(3 - 4 [76 - 102] NL Bottom Outlet Only) |
| ___ -H Hinged Grate | ___ -TS Top Secured with Slotted Screws |
| ___ -HP Heel-Proof Grate | ___ -V Backwater Valve (See Z1099) |
| ___ -HT Square Hinged Grate | ___ -VP Vandal-Proof Secured Top |
| ___ -P Trap Primer Connection | ___ -Y Sediment Bucket |
| ___ -S Secondary Strainer | |

* Regularly furnished unless otherwise specified.