




**Z1185-122**  
**LINT INTERCEPTOR**  
**W/6 [152] INLET/OUTLET**

SPECIFICATION SHEET

TAG \_\_\_\_\_

Dimensional Data (inches and [ mm ]) are Subject to Manufacturing Tolerances and Change Without Notice

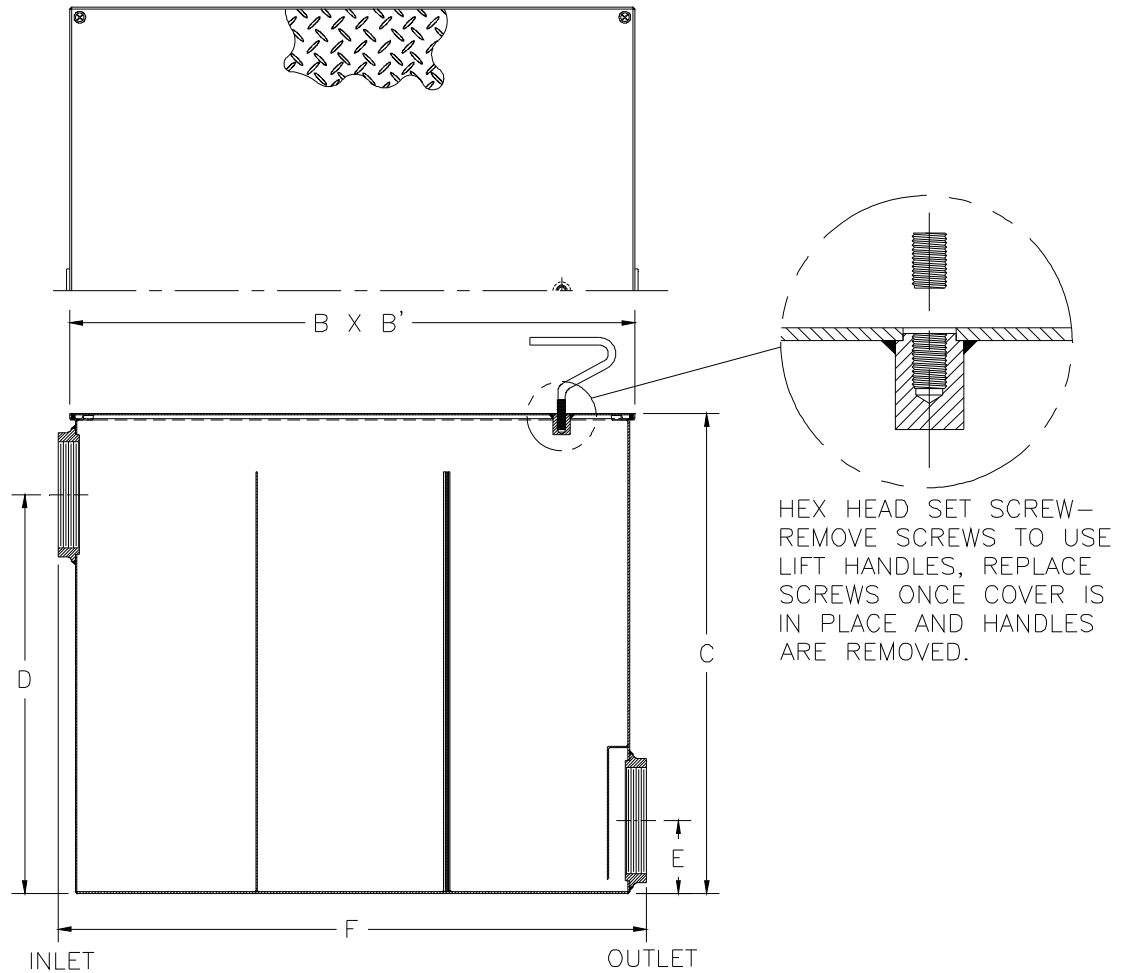

Size No. of Machines	Inlet/Outlet Size	Flow Rate G.P.M. [L]	Approx. Wt. Lbs. [kg]	Dimensions In Inches					
				B	B'	C	D	E	F
10	6 [152]	100 [378]	280 [127]	33 [838]	33 [838]	33 [838]	26 [660]	5 [127]	34 [864]

**ENGINEERING SPECIFICATION:** ZURN Z1185-122

Acid Resistant Coated interior and exterior fabricated steel lint interceptor, non-skid secured cover, with stainless lint intercepting secondary screen assembly and permanent primary straining baffle. Regularly furnished with 6 [152] high inlet and low outlet.

**OPTIONS** (Check/specify appropriate options)

**PREFIXES**

\_\_\_ Z Acid Resistant Coated Fabricated Steel\*

**SUFFIXES**

\_\_\_ -E Acid Resistant Coated interior and exterior fabricated steel extension section  
 (Specify 'C' dimension required for recessed installation).

\_\_\_ -RS Stainless Steel Screen Replacement Assembly

<b>REV.</b>	<b>DATE:</b> 1/13/10	<b>C.N. NO.</b> 110590
<b>DWG. NO.</b> P-15832		<b>PRODUCT NO.</b> Z1185-122

\*REGULARLY FURNISHED UNLESS OTHERWISE SPECIFIED