




Z415SC-SR

BODY ASSEMBLY W/ "TYPE SC" STRAINER AND STABILIZER RING

SPECIFICATION SHEET

TAG _____

Dimensional Data (inches and [mm]) are Subject to Manufacturing Tolerances and Change Without Notice

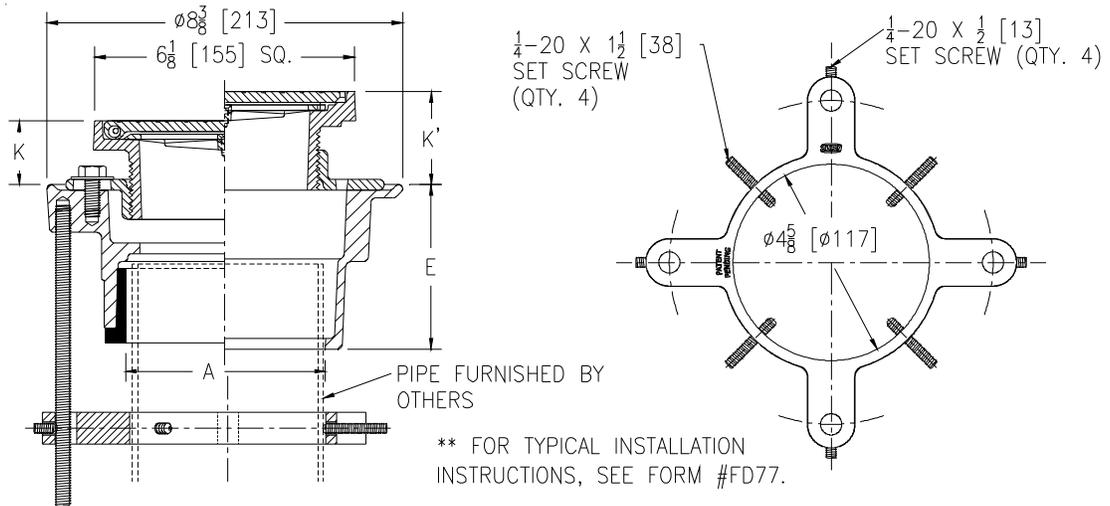

Dimensions in In [mm]						Approx. Wt. Lbs. [kg]
Strainer Desig.	A - Pipe Size	K		K'		
		Min.	Max.	Min.	Max.	
-6SC	2,3,4 [51,76,102]	1-3/16 [30]	1-15/16 [49]	1-3/4 [44]	2-7/8 [73]	18 [8]

ENGINEERING SPECIFICATION: ZURNZN415SC-SR

Floor and shower drain, Dura-Coated cast iron body with bottom outlet, combination invertible membrane clamp, adjustable collar with seepage slots and "TYPE SC" polished nickel bronze strainer with flashing clamp device and adjustable strainer top with solid scoriated hinged, light-duty cover. Complete with Dura-Coated cast iron floor drain stabilizer ring with four 1/4-20 x 1/2" [13mm] securing screws to 3/8-16 x 7" [178mm] threaded rods and four 1/4-20 x 1-1/2" [38mm] securing screws to outlet piping.

OPTIONS (Check/specify appropriate options)

PIPE SIZE

2,3,4 [51,76,102]
2,3,4 [51,76,102]

(Specify size/type) OUTLET

___ NH No-Hub
___ NL Neo-Loc

'E' BODY HT. DIM.

3-13/16 [97]
3-7/8 [98]

PREFIXES

___ ZB D.C.C.I. Body Assembly w/ Polished Bronze Top
___ ZN D.C.C.I. Body Assembly w/ Polished Nickel Bronze Top*

SUFFIXES

___ -AR	Acid Resisting Epoxy Coated Cast Iron	___ -U	1-3 [25-76] High Extension Adapter
___ -CP	Chrome-Plated Top	___ -V	Backwater Valve (Not Available with -Y)
___ -G	Galvanized Cast Iron	___ -VP	Vandal-Proof Secured Top
___ -GC	Gasketed Cover	___ -Y	Sediment Bucket (Not Available with -V)
___ -LR	Lift Ring		
___ -P	Trap Primer Connection (Specify 1/2 [13] or 3/4 [19])		
___ -TC	Neo-Loc Test Cap Gasket (2,3,4 [51,76,102] NL Outlet Only)		
___ -TS	Top Secured with Slotted Screw		

* Regularly furnished unless otherwise specified.