


SOLIDS INTERCEPTOR W/ LOW MICRON DISPOSABLE FILTER BAGS, EXTENSION & TOP FLUSH FLOOR INSTALLATION

Z1183-89

TAG _____

Dimensional Data (inches and [mm]) are Subject to Manufacturing Tolerances and Change Without Notice

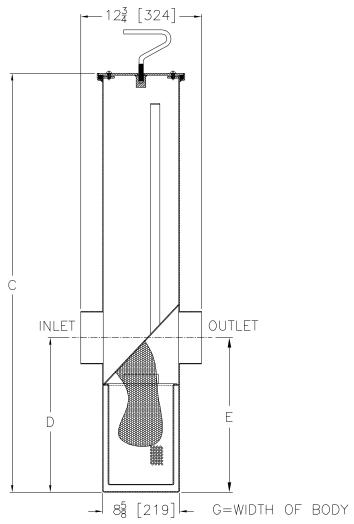

Size	Inlet/ Outlet Size	Flow Rate G.P.M. [L]	Solids Cap. of Basket Cubic Ft. [m³]	Dimensions in Inches			No. of
				С	G	D/E	Filter Bags Per Unit]
700	4 [102]	35 [132]	1.17 [.033]	44 3/16 [1122]	22 1/2 [572]	14 3/16 [360]	3

ENGINEERING SPECIFICATION: ZURN Z1183-89 Stainless steel, solids interceptor, for on floor recessed installation with low micron replaceable filter bags, retainer plate, extension, top flush lid, and removable sediment basket. Size to be used with corresponding Z1170 grease Interceptor.

PREFIXES

Z All Type 304 Fabricated Stainless Steel

SUFFIXES

_____ -XB Extra Solids Interceptor Basket.

_____ -XXF Extra Supply of 30 Low Micron Solids Filter Bags.

CAUTION: Solids interceptor must be maintained periodically in order to ensure proper operation of the system. Cleaning schedule based on usage.

REV. DATE: 10/31/06 C.N. NO. 95796

DWG. NO. P-15350 PRODUCTNO. Z1183-89

Note: Low Micron Filters May Reduce Flow In Some Conditions.