
Z100-381



15 [381] DIAMETER MAIN ROOF DRAIN W/2 [51] HIGH EXTERNAL WATER, MESH SCREEN, STANDPIPE AND UPPER Z100-FG

TAG ____

Dimensional Data (inches and [mm]) are Subject to Manufacturing Tolerances and Change Without Notice

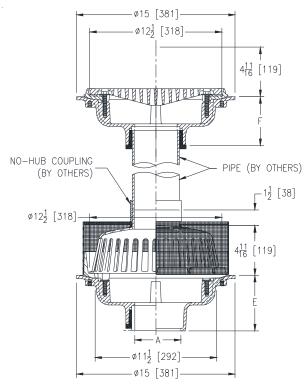

A Pipe Size	Approx. Wt.	Dome Open Area	
Inches [mm]	Lbs. [kg]	Sq. ln. [cm²]	
2,3,4 [51, 76, 102]	54 [24]		
6 [152]	52 [24]	32 [206]	
8 [203]	53 [24]		

ENGINEERING SPECIFICATION: ZURN Z100-381

15" [381mm] Diameter roof drain. Dura-Coated cast iron body with 2 [51] combination membrane flashing clamp/gravel guard, low silhouette cast iron dome, stainless mesh screen, no-hub coupling on lower body, and standpipe (by others) and upper Z100-FG.

OPTIONS (Check/specify appropriate options)

PIPE SIZE 3,4,6 [76,102,152] 2,3,4,6,8 [51,76,102,152,203] 2,3,4,6,8 [51,76,102,152,203] 2,3,4 [51,76,102] 6 [152]	(Specify size/type) OUTLET IC	*1	E' BODY HT. DIM. 5-1/4 [133] 3-3/4 [95] 5-1/4 [133] 4-9/16 [116] 5-7/16 [112]	'F' BODY HT. DIM 4-9/16 [116] 5-7/16 [112]
PREFIXES Z D.C.C.I. Body with Grate	*			
SUFFIXES -AC Angular Underdeck Clam -AR Acid Resistant Epoxy Co -C Underdeck Clamp (Lower -DX Dex-O-Tex Flange -G Galvanized Cast Iron -GD Galvanized Cast Iron Dor -R Roof Sump Receiver (Lower -SC Secondary Clamp Collar * Regularly furnished unless otherwise speci	nated r Body) ne (Lower Body) ver Body)	TC VP 84 89 90	(2,3,4 [51,76,102] Vandal-Proof Secu Stainless Steel Per 2 [51] High Externa 90° Threaded Side	forated Gravel Guard al Water Dam (Upper Body)

Zurn Industries, LLC | Specification Drainage Operation 1801 Pittsburgh Avenue, Erie, PA U.S.A. 16502 · Ph. 855-663-9876, Fax 814-454-7929

In Canada | **Zurn Industries Limited** 7900 Goreway Drive, Unit 10, Brampton, Ontario L6T 5W6, 877-892-5216

Rev.

Date: 04/27/2020 C.N. No. 142630

Prod. | Dwg. No. Z100-381