




Z121-123

12 [305] DIAMETER MAIN ROOF DRAIN W/ TOP SET DECK PLATE AND NO-HUB STANDPIPE AND Z121 UPPER ASSEMBLY W/ TOP SET DECK PLATE

SPECIFICATION SHEET

TAG _____

Dimensional Data (inches and [mm]) are Subject to Manufacturing Tolerances and Change Without Notice

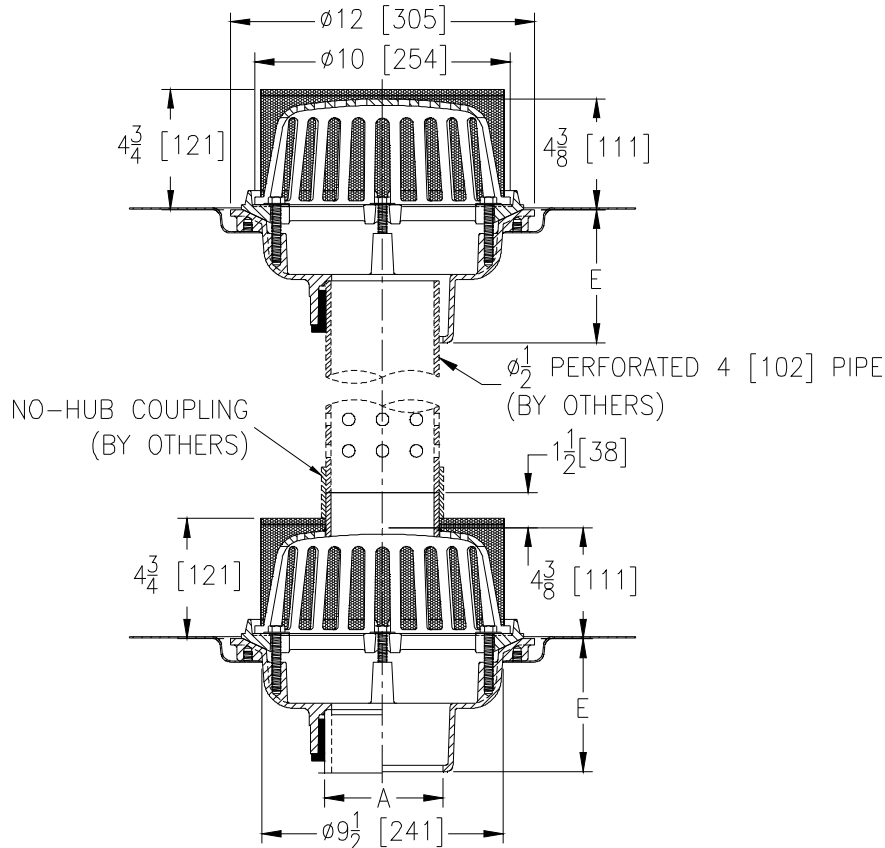

A Pipe Size In. [mm]	Approx. Wt. Lbs. [kg]	Dome Open Area Sq. In. [cm ²]
2,3,4 [51,76,102]	40 [18]	78 [503]
6 [152]	39 [17]	

ENGINEERING SPECIFICATION: ZURNZ121-123

12" [305mm] Diameter roof drain. Dura-Coated cast iron body with combination membrane flashing clamp/gravel guard and low silhouette cast iron dome with 4" [102mm] no-hub standpipe, Top Set deck plate and stainless steel mesh over dome. Upper assembly is 12" [305mm] Diameter roof drain. Dura-Coated cast iron body with combination membrane flashing clamp/gravel guard, Top Set deck plate and low silhouette cast iron dome with stainless steel mesh over dome.

OPTIONS (Check/specify appropriate options)

PIPE SIZE

2,3,4,5,6 [51,76,102,127,152]
 2,3,4,5,6 [51,76,102,127,152]
 2,3,4,5,6 [51,76,102,127,152]
 2,3,4 [51,76,102]

(Specify size/type) OUTLET

___ IC Inside Caulk
 ___ IP Threaded
 ___ NH No-Hub
 ___ NL Neo-Loc

E BODY HT. DIM.

5-1/4 [133]
 3-3/4 [95]
 5-1/4 [133]
 4-9/16 [116]

PREFIXES

___ Z D.C.C.I. Body and Dome*

SUFFIXES

___ -AR Acid Resistant Epoxy Coated	___ -GD Galvanized Cast Iron Dome
___ -C Underdeck Clamp	___ -R Roof Sump Receiver
___ -DR Top-Set@ Drain Riser	___ -TC Neo-Loc Test Cap Gasket (2-4 [51-102] NL Bottom Outlet Only)
___ -EB Top-Set@ Adjustable Extension Assembly	___ -VP Vandal-Proof Secured Top
___ -G Galvanized Cast Iron	___ -90 90° Threaded Side Outlet Body (2 thru 6 [51 thru 152])

* Regularly furnished unless otherwise specified.