




# Z1187-SI-126

## 20 GPM SAND INTERCEPTOR WITH 6[152] INTEGRAL EXTENSION

SPECIFICATION SHEET

TAG \_\_\_\_\_

Dimensional Data (inches and [ mm ]) are Subject to Manufacturing Tolerances and Change Without Notice

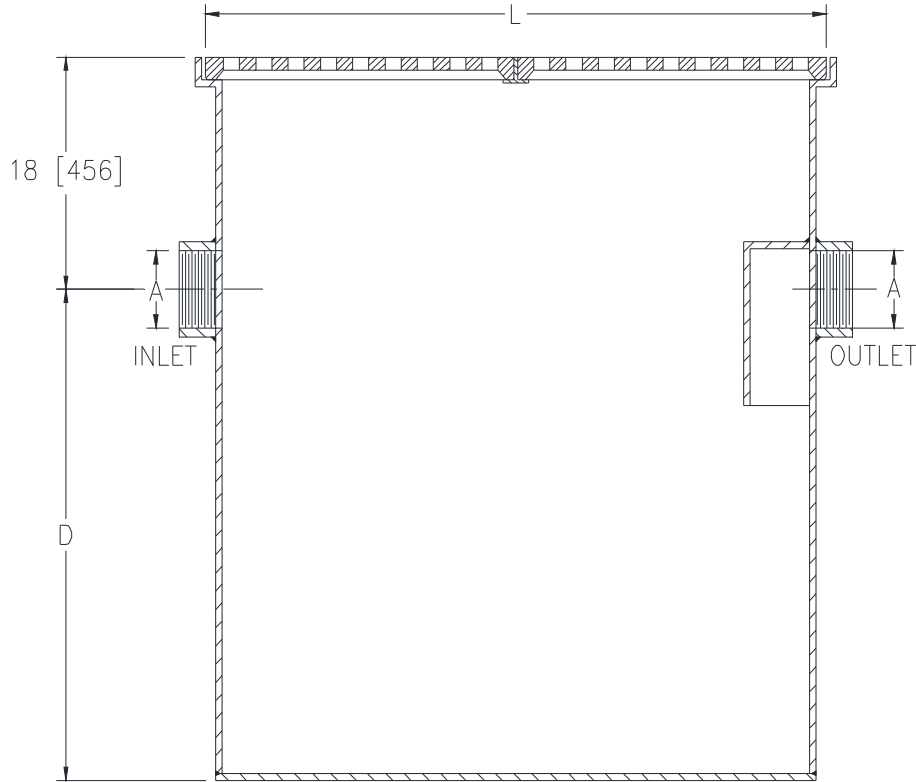

Size	Flow G.P.M. [LPM] (Max.)	Dimensions in in. [mm]			Capacity Gal. [L] (Static)	Width
		A Pipe Size	L	D		
20	20 [76]	4 [102]	24 [610]	26 [660]	60 [227]	24 [610]

### ENGINEERING SPECIFICATION: ZURN Z1187-SI-126

Acid Resistant Coated interior and exterior fabricated steel sand interceptor with threaded inlet and outlet, removable heavy duty grates, and 6" [152mm] integral extension.

**OPTIONS** (Check/specify appropriate options)

### PREFIXES

\_\_\_ Z Acid Resistant Coated Fabricated Steel\*

### SUFFIXES

\_\_\_ -NH No-Hub Inlet and Outlet (Specify Size)

\_\_\_ -VP Vandal Proof Screws

\* Regularly furnished unless otherwise specified.

**Zurn Industries, LLC | Specification Drainage Operation**  
 1801 Pittsburgh Avenue, Erie, PA U.S.A. 16502 · Ph. 855-663-9876, Fax 814-454-7929  
 In Canada | **Zurn Industries Limited**  
 3544 Nashua Drive, Mississauga, Ontario L4V 1L2 · Ph. 905-405-8272, Fax 905-405-1292  
[www.zurn.com](http://www.zurn.com)

Rev. -  
 Date: 03/22/2017  
 C.N. No. 136474  
 Prod. | Dwg. No. Z1187-SI-126