




# Z415K-V

## BODY ASSEMBLY WITH "TYPE K" STRAINER AND BACKWATER VALVE

SPECIFICATION SHEET

TAG \_\_\_\_\_

Dimensional Data (inches and [ mm ]) are Subject to Manufacturing Tolerances and Change Without Notice

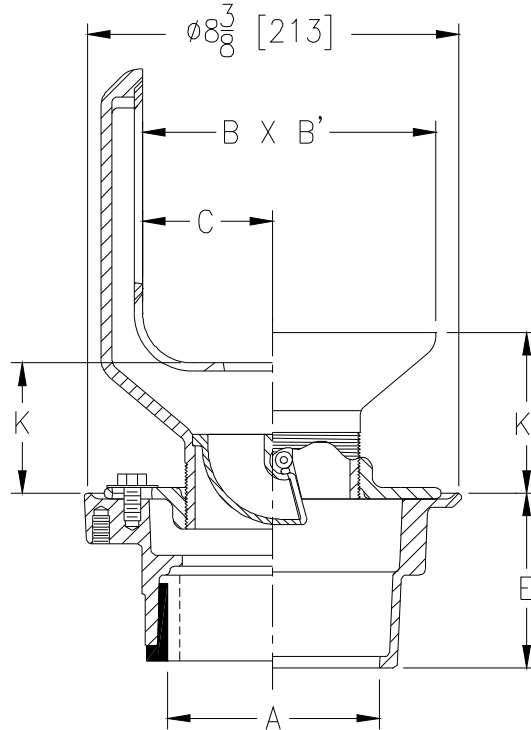

Strainer Desig.	Dimensions in In [mm]							Approx. Wt. Lbs. [kg]	Strainer Open Area Sq. In. [cm <sup>2</sup> ]
	A - Pipe Size	B X B'	C	K		K'			
				Min.	Max	Min.	Max.		
-5K	2,3,4 [51,76,102]	3-3/4 x 5 [96 x 127]	1-7/32 [31]	1 [25]	2 [51]	1-3/4 [44]	2-3/4 [70]	18 [8]	11 [71]
-7K	2,3,4 [51,76,102]	6-5/8 x 7 [168 x 178]	2-15/16 [75]	2-3/16 [56]	3-3/8 [86]	2-7/8 [73]	4-1/8 [105]	25 [11]	29 [187]

### ENGINEERING SPECIFICATION: ZURN ZN415K-V

Floor and shower drain, Dura-Coated cast iron body with bottom outlet, combination invertible membrane clamp and adjustable collar with "TYPE K" polished, nickel bronze angular strainer and backwater valve.

### OPTIONS (Check/specify appropriate options)

PIPE SIZE	(Specify size/type)	OUTLET	'E' BODY HT. DIM.
2 [51]	_____	IP Threaded	2-7/16 [62]
3 [76]	_____	IP Threaded	2-3/4 [70]
4 [102]	_____	IP Threaded	2-13/16 [71]
2,3,4 [51,76,102]	_____	NH No-Hub	3-13/16 [97]
2,3,4 [51,76,102]	_____	NL Neo-Loc	3-7/8 [98]

### PREFIXES

- \_\_\_\_\_ ZB D.C.C.I. Body Assembly w/Polished Bronze Top
- \_\_\_\_\_ ZN D.C.C.I. Body Assembly w/Polished Nickel Bronze Top\*

### SUFFIXES

- |  |  |
|--|--|
| _____ -AR Acid Resisting Epoxy Coated Cast Iron                | _____ -SR Stabilizer Ring (See Z400-SR)                    |
| _____ -G Galvanized Cast Iron                                  | _____ -U 1-3 [25-75] High Extension Adapter                |
| _____ -P Trap Primer Connection (Specify 1/2 [13] or 3/4 [19]) | _____ -VP Vandal Proof Secured Top                         |
| _____ -SA Stabilizer Assembly (See Z1035)                      | _____ -90 90° Threaded Side Outlet Body (2,3 [51,76] Only) |
| _____ -SQ Stabilizer Q-deck (See Z1035-Q)                      |  |

\* Regularly furnished unless otherwise specified.