




Z520-85

Ø9 [229] ADJUSTABLE MEDIUM-DUTY DRAIN WITH SUR-SET BUCKET

SPECIFICATION SHEET

TAG _____

Dimensional Data (inches and [mm]) are Subject to Manufacturing Tolerances and Change Without Notice

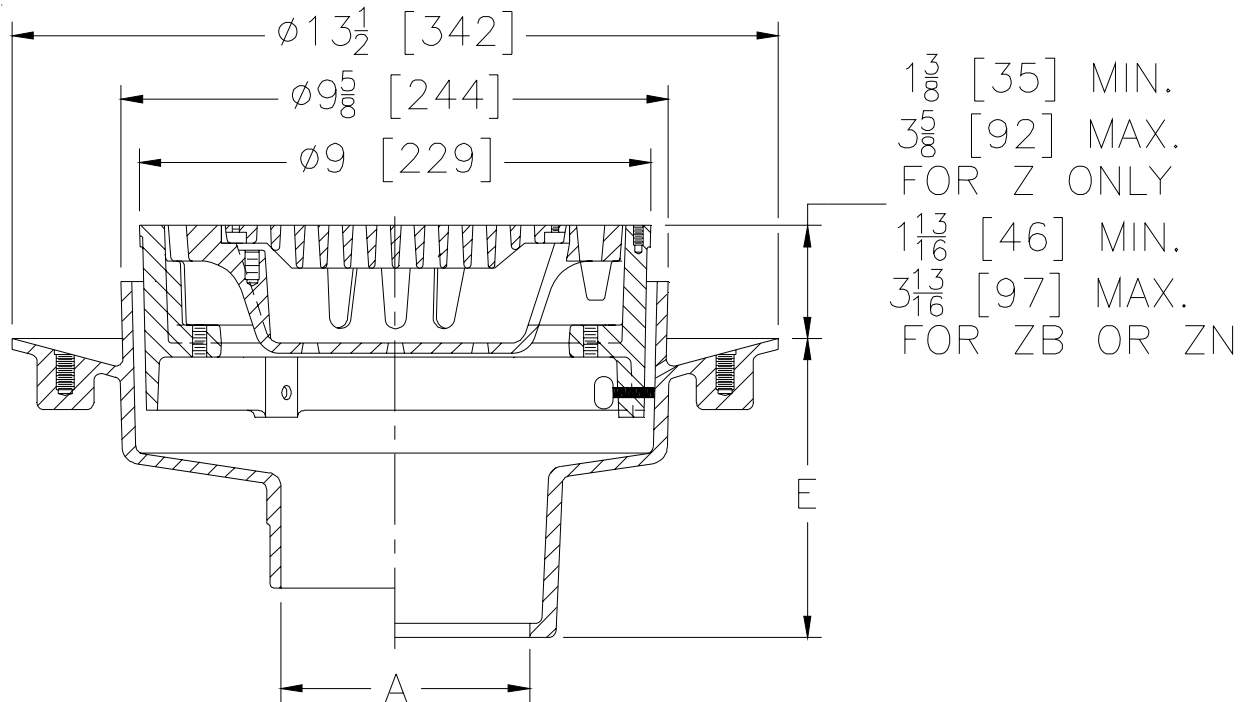

A- Pipe Size In.	Approx. Wt. Lbs. [kg]	Grate Open Area Sq. In. [cm ²]
2-3-4-6 [51-76-102-152]	39 [18]	18 [116]

ENGINEERING SPECIFICATION: ZURN Z520-85
 9 [229] Diameter top drain, Dura-Coated cast iron body with bottom outlet, seepage pan and adjustable extension frame with medium duty cast iron grate with sur-set bucket.

OPTIONS (Check/specify appropriate options)

PIPE SIZE	(Specify size/type)	OUTLET	'E' BODY HT. DIM.
2, 3, 4 [51,76,102]	_____	IC Inside Caulk	5-1/4 [133]
2, 3, 4 [51,76,102]	_____	IG Inside Caulk Gasket	5-1/4 [133]
2, 3, 4 [51,76,102]	_____	IP Threaded	3-1/2 [89]
2, 3, 4, 6 [51,76,102,152]	_____	NH No-Hub	4-1/4 [108]
2, 3, 4 [51,76,102]	_____	NL Neo-Loc	4-3/8 [111]

PREFIXES

- _____ Z D.C.C.I. Body and Grate*
- _____ ZB D.C.C.I. Body with Polished Bronze Grate (Add 5/8 [16] to 9 [229] Dim.)
- _____ ZN D.C.C.I. Body with Polished Nickel Bronze Grate (Add 5/8 [16] to 9 [229] Dim.)

SUFFIXES

- _____ -AR Acid Resisting Epoxy Coated Cast Iron
- _____ -C Clamp Collar
- _____ -DG Duresist Grate & Bucket
- _____ -F Extension Frame(Specify Total Height Req'd)
- _____ -G Galvanized Cast Iron
- _____ -P Trap Primer Connection
- _____ -S Secondary Strainer
- _____ -SS Stainless Mesh Liner for Bucket
- _____ -TS Top Secured with Slotted Screws
- _____ -V Backwater Valve (See Z1099)
- _____ -VP Vandal Proof Secured Top
- _____ -90 90° Side Outlet (See Z1042)

*REGULARLY FURNISHED UNLESS OTHERWISE SPECIFIED

REV. A	DATE: 10/26/10	C.N. NO. 111992
DWG. NO. P-14373	PRODUCT: NO. Z520-85	