




Z1171-75
LOW PROFILE GREASE INTERCEPTOR
WITH DRAW-OFF VALVE

SPECIFICATION SHEET

TAG _____

Dimensions Subject to Manufacturing Tolerances

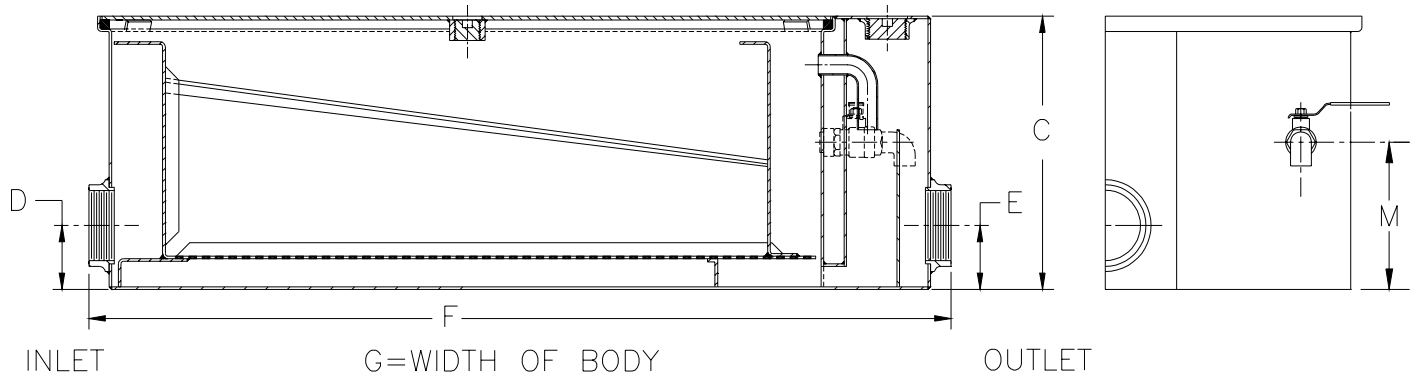

Size	Inlet/Outlet Size**	Flow Rate G.P.M.	Capacity		Approx. Wt. Lbs.	Dimensions In Inches					M C/L Valve
			Water Gal.	Grease Lbs.		C	D	E	F	G	
500	3**	20	15	40	102	10	3-1/8	3-1/8	31	21-1/8	7-3/4
700		35	30	70	172	10-3/4	3-1/8	3-1/8	42-1/8	29-3/8	7-11/16
800		50	45	100	210	16	10	10	49-1/2	27-3/4	8-9/16

ENGINEERING SPECIFICATION: ZURN Z1171-75 Acid Resistant Coated interior and exterior fabricated steel low type grease interceptor, rated at _____ GPM and _____ Lbs. grease capacity, with internal air relief by-pass, bronze cleanout plug and visible double wall trap seal with removable combination pressure equalizing/flow diffusing baffle and sediment tray adjacent to grease draw-off valve. Gasketed non-skid secured cover with enzyme port having bronze plug, complete with flow control fitting. Regularly furnished with 3" low inlet and outlet.**

OPTIONS (Check/specify appropriate options)

PREFIXES

_____ Z Acid Resistant Coated Fabricated Steel*

SUFFIXES

_____ -L Angle type (Z-1108-L) flow control device.

REV. A DATE: 10/15/02 C.N. NO. 89984
DWG. NO. P-14080 PRODUCT NO. Z1171-75

*REGULARLY FURNISHED UNLESS OTHERWISE SPECIFIED