




Z1171-80

LOW PROFILE GREASE INTERCEPTOR W/ HIGH INLET AND OUTLET

SPECIFICATION SHEET

TAG _____

Dimensional Data (inches and [mm]) are Subject to Manufacturing Tolerances and Change Without Notice

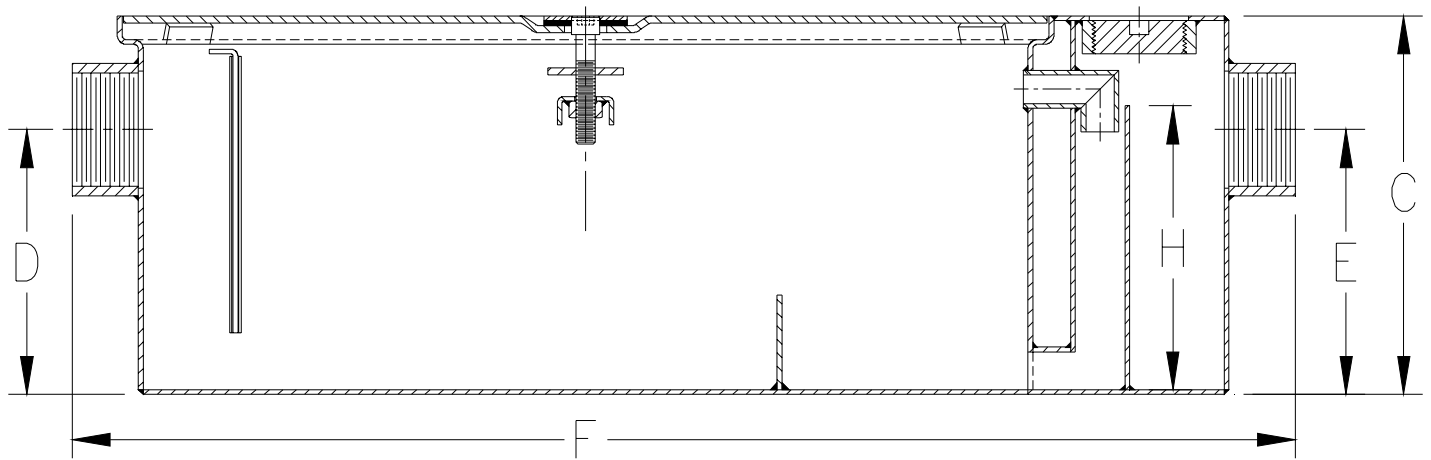

INLET

G = WIDTH OF BODY

OUTLET

Size	Inlet/ Outlet Size*	Flow Rate G.P.M. [L]	Capacity		Approx. Wt. Lbs. [kg]	Dimensions in Inches				
			Water Gal. [L]	Grease Lbs. [kg]		C	D/E	F	G	H
500	3* [76]	20 [76]	15 [60]	40 [18]	102 [46]	11 [279]	7 [178]	31 [787]	21 1/8 [536]	6 3/4 [171]

ENGINEERING SPECIFICATION: ZURN Z1171-80 Acid Resistant Coated interior and exterior fabricated steel low type grease interceptor, rated at 20 GPM and 40 Lbs. grease capacity, with internal air relief by-pass, bronze cleanout plug, removable pressure equalizing/flow diffusing inlet baffle, fixed bottom outlet baffle, and visible double wall trap seal. Gasketed non-skid secured cover, complete with center tie down assembly and Z1108 flow control fitting. Regularly furnished with 3 [76] high inlet and outlet.*

OPTIONS (Check/specify appropriate options)

PREFIXES

- ___ Z Acid Resistant Coated Fabricated Steel*
- ___ ZS All Type 304 Fabricated Stainless Steel

SUFFIXES

- ___ -L Angle Type (Z1108-L) Flow Control Device with Plunger.

REV.	DATE: 1/7/10	C.N. NO. 110578
DWG. NO. P-15827 PRODUCT NO. Z1171-80		

*REGULARLY FURNISHED UNLESS OTHERWISE SPECIFIED