




# Z-1186-104 OIL INTERCEPTOR

SPECIFICATION SHEET

TAG \_\_\_\_\_

Dimensional Data (inches and [ mm ]) are Subject to Manufacturing Tolerances and Change Without Notice

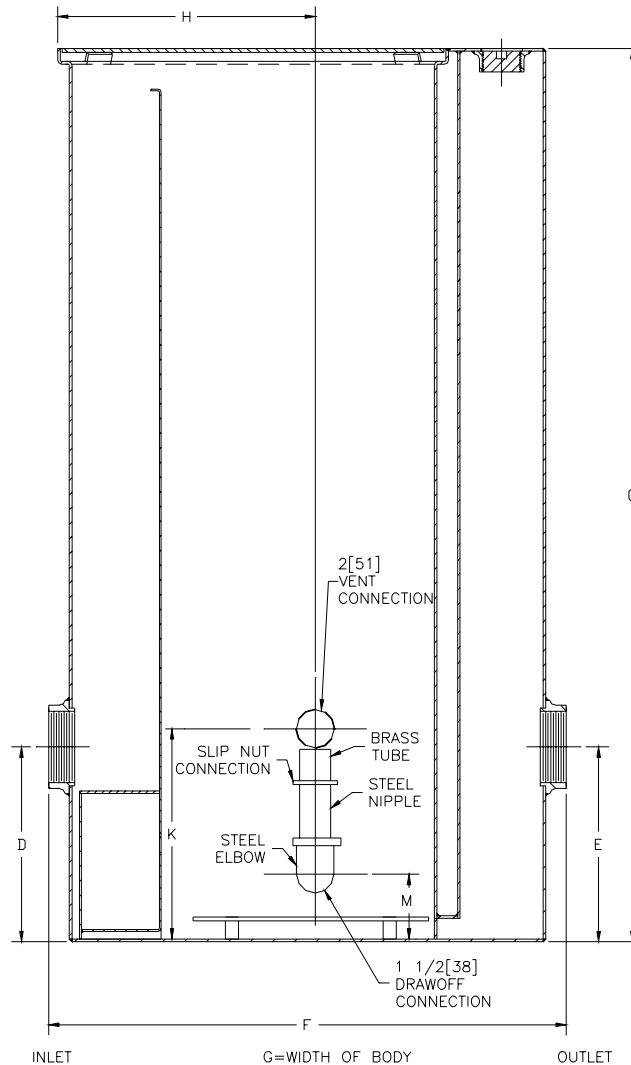

Size	Inlet/ Outlet Size **	Flow Rate GPM [L]	Water Cap. Gal. [L]	Approx. Wt.Lbs. [kg]	Dimensions In Inches						
					C	D/E	F	G	H	K	M
700	3 [75]	35 [132]	21 [79]	140 [64]	43 [1092]	12 1/2 [318]	32 1/4 [819]	19 7/8 [505]	16 3/8 [416]	16 3/4 [425]	6 7/16 [164]

**ENGINEERING SPECIFICATION:** ZURN Z-1186-104 Fabricated Stainless Steel oil interceptor, bronze cleanout plug and visible double wall trap seal, removable combination pressure equalizing/flow diffusing baffle and sediment bucket, horizontal baffle, adjustable oil drawoff and vent connections either side, secured gasketed non-skid cover, complete with flow control fitting. Regularly furnished with inlet and outlet in high position.

**OPTIONS** (Check/specify appropriate options)

**PREFIXES**

\_\_\_\_ ZS- Fabricated Stainless Steel\*

\*\* Inlet and outlet sizes shown indicate standard operating sizes and flow control setting. Size #700 and will have 4 102] connections reduced to 3 [76] as standard.

REV.	DATE: 4/21/99	C.N. NO. 82436
DWG. NO. P-14710 PRODUCT NO. Z-1186-104		

\*REGULARLY FURNISHED UNLESS OTHERWISE SPECIFIED