




# Z1185-143

## SIZE 1 LINT INTERCEPTOR W/LOW INLET & OUTLET

SPECIFICATION SHEET

TAG \_\_\_\_\_

Dimensional Data (inches and [ mm ]) are Subject to Manufacturing Tolerances and Change Without Notice

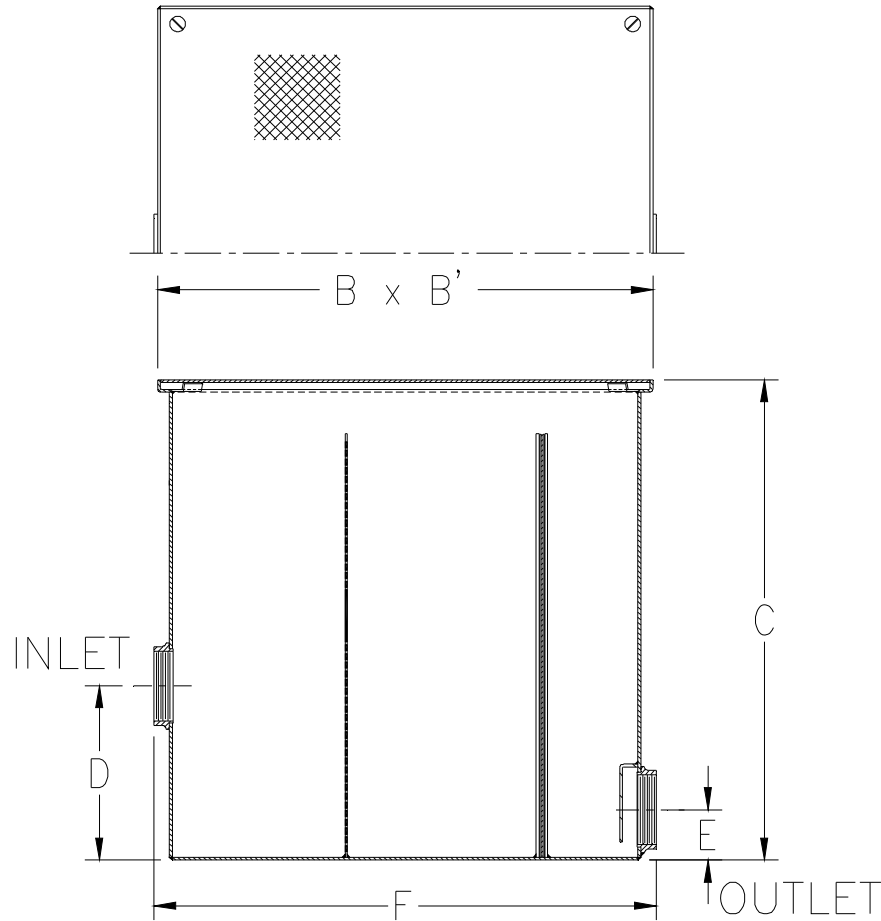

Size No. of Machines	Inlet/Outlet Size In [mm]	Flow Rate G.P.M. [L.P.M]	Approx. Wt. Lbs. [kg]	Dimensions In Inches [mm]					
				B	B'	C	D	E	F
1	4 [102]	10 [38]	93 [42]	17 [432]	17 [432]	16-1/2 [419]	4-1/2 [114]	4 [102]	17-1/4 [438]

**ENGINEERING SPECIFICATION: ZURNZ1185-143**

Acid Resistant Coated interior and exterior fabricated steel lint interceptor, non-skid secured cover, aluminum lint intercepting secondary screen assembly, and permanent primary straining baffle with 3/8" [10mm] diameter perforated holes. Regularly furnished with low inlet and low outlet.

**OPTIONS** (Check/specify appropriate options)

**PREFIXES**

- \_\_\_\_\_ Z Acid Resistant Coated Fabricated Steel\*
- \_\_\_\_\_ ZS All Type 304 Fabricated Stainless Steel

**SUFFIXES**

- \_\_\_\_\_ -E Acid Resistant Coated interior and exterior fabricated steel extension section (Specify 'C' dimension required for recessed installation).
- \_\_\_\_\_ -RS Aluminum Screen Replacement Assembly

\* Regularly furnished unless otherwise specified.