




Z1185-168

LINT INTERCEPTOR W/INTEGRAL EXTENSION
AND VANDAL PROOF COVER RECESSED FOR 1/8 [3]
THICK TILE

SPECIFICATION SHEET

TAG _____

Dimensional Data (inches and [mm]) are Subject to Manufacturing Tolerances and Change Without Notice

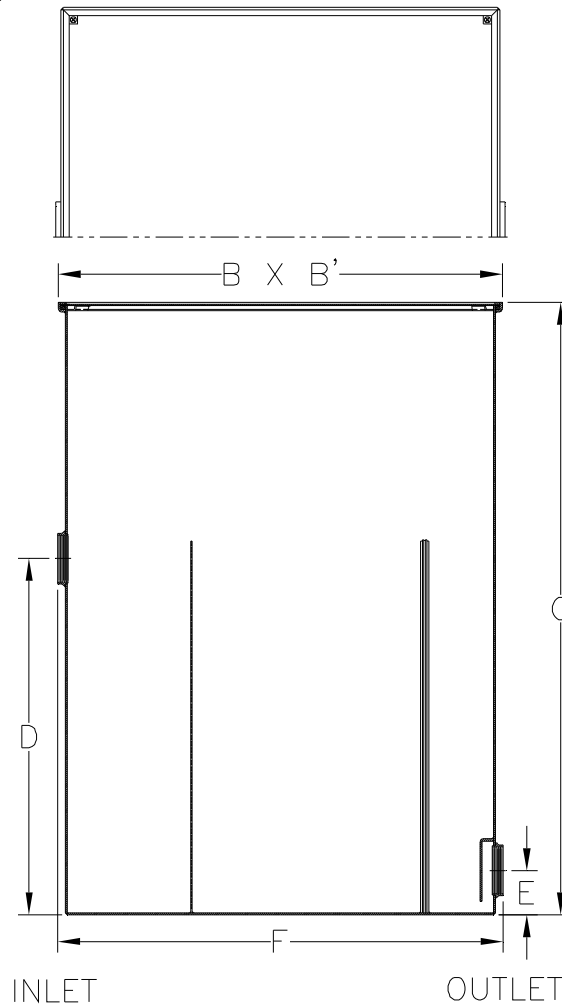

Size No. of Machines	Inlet/Outlet Size	Flow Rate G.P.M. [L.P.M.]	Approx. Wt. Lbs. [kg]	Dimensions In Inches					
				B	B'	C	D	E	F
3	2 [51]	30 [114]	120 [54]	17 [432]	17 [432]	24-1/2 [622]	13-1/2 [343]	3-1/4 [83]	17-1/4 [438]

ENGINEERING SPECIFICATION: ZURNZ1185-168

Acid Resistant Coated interior and exterior fabricated steel lint interceptor, vandal proof secured cover recessed for 1/8 [3] thick tile, with stainless lint intercepting secondary screen assembly and permanent primary straining baffle. Regularly furnished with high inlet and low outlet.

OPTIONS (Check/specify appropriate options)

PREFIXES

- ____ Z Acid Resistant Coated Fabricated Steel*
- ____ ZS All Type 304 Fabricated Stainless Steel

SUFFIXES

- ____-RS Stainless Steel Screen Replacement Assembly

* Regularly furnished unless otherwise specified.