




# Z1170-114

## GREASE INTERCEPTOR W/DUAL SIDE OUTLETS

SPECIFICATION SHEET

TAG \_\_\_\_\_

Dimensional Data (inches and [ mm ]) are Subject to Manufacturing Tolerances and Change Without Notice

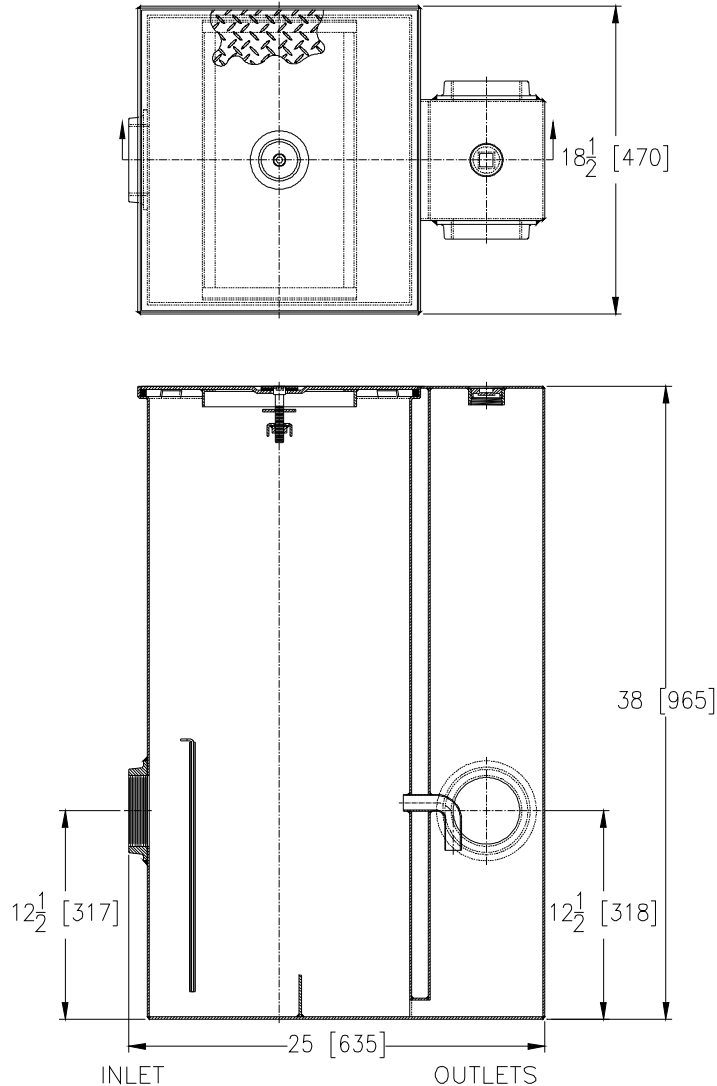

| Inlet/<br>Outlet<br>Size | Capacity          | Approx.<br>Wt. Lbs.<br>[kg] |
|--------------------------|-------------------|-----------------------------|
|                          | Water<br>Gal. [L] |                             |
| 4 [102]                  | 15 [57]           | 170 [77]                    |

**ENGINEERING SPECIFICATION:** ZURN Z1170-114 Acid Resistant Coated interior and exterior fabricated steel grease interceptor, with internal air relief by-pass, bronze cleanout plug, removable pressure equalizing/flow diffusing inlet baffle, fixed bottom outlet baffle, visible double wall trap seal, and dual left-hand and right-hand side outlets. Gasketed non-skid secured cover complete with center tie down assembly, with Z1108 flow control fitting. Note: Location of outlet from bottom of interceptor cannot be changed.

**PREFIXES**

- \_\_\_\_\_ Z Acid Resistant Coated Fabricated Steel\*
- \_\_\_\_\_ ZS All Type 304 Fabricated Stainless Steel

**SUFFIXES**

- \_\_\_\_\_ -AL Aluminum Cover
- \_\_\_\_\_ -HD Heavy Duty Cover rated at 10,000 lbs. maximum safe live load.
- \_\_\_\_\_ -K Anchor flange 1 3/4 [44] down from top and 2 [51] wide.
- \_\_\_\_\_ -KC Anchor flange 1 3/4 [44] down from top and 2 [51] wide with clamp collar.
- \_\_\_\_\_ -L Angle type (Z1108-L) flow control device with plunger.

Note: Interceptor size designed for custom specifications as outlined by Miller Sales Inc.

|                  |               |                       |
|------------------|---------------|-----------------------|
| REV.             | DATE: 5/12/05 | C.N. NO. 93370        |
| DWG. NO. P-15150 |               | PRODUCT NO. Z1170-114 |

\*REGULARLY FURNISHED UNLESS OTHERWISE SPECIFIED