


ADJUSTABLE VERTICAL SIPHON **JET No-Hub WITH Z1212**

Z1204-ND-A

SPECIFICATION SHEET

TAG

Dimensional Data (inches and [mm]) are Subject to Manufacturing Tolerances and Change Without Notice

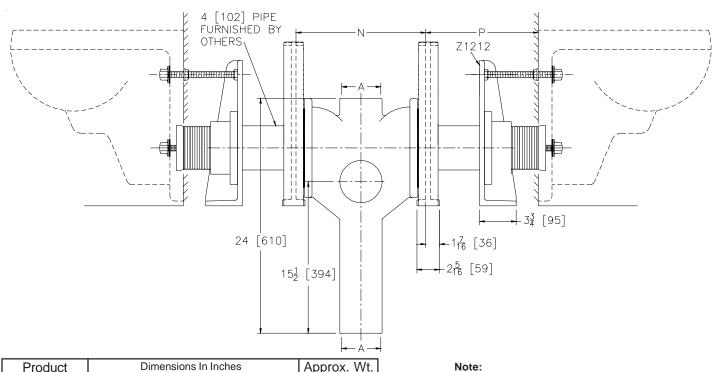

No. Ν Lbs. [kg.] Α Н 4 [102] Z1204-ND4 5-1/2[140] 13-1/4 [337] 169 [77] Z1204-ND5 5 [127] 6-1/2[165] 13-1/4 [337] 170 [77] 6 [152] 6-1/2 [165] 14-1/4 [362] Z1204-ND6 175 [79]

Note:

- Two 4 [102] or 5 [127] side inlets as indicated.
- Feet bolted to floor using min. 1/2 [13] dia. bolts and back slots on carrier feet.

ENGINEERING SPECIFICATION: ZURN Z1204-ND()-A

*REGULARLY FURNISHED UNLESS OTHERWISE SPECIFIED

Adjustable, vertical siphon jet water closet "Rigid System" with () size No-Hub connections and () side inlets. Complete with Dura-Coated cast iron right and left hand fitting, with 2 [51] vent, adjustable gasketed face plate, universal floor mounted foot supports, corrosion resistant adjustable ABS coupling with integral test cap, fixture bolts, trim, and stud protectors. Rear anchor tie down, and bonded "Neo-Seal" gasket. Furnished with Z1212 auxiliary support assembly

PRODUCT/DEFINITION

	Z1204-ND		No-Hub Stack, Double Inlets, 2 [51] Ver	nt.			
PREFIX	(ES Z ZQ		. System with Zurn "ZZ" Adjustab . System with NPT Face Plate, N		_	Couplin	ng	
SUFFIX	ES -B -BC -CC -CL -G -JJ -JR -T	Blowout Type Fixture Support Back Cleanout Cast Iron Coupling 6 [152] Long Coupling Length Greater than 12 [305] (Specify length if greater than 6 [152]) Galvanized Cast Iron 2 [51] Auxiliary Inlet 2 [51] Left Hand Auxiliary Inlet 2 [51] Right Hand Auxiliary Inlet Threaded Stack Connection			VP 29 45 61		Vandal Proof Trim Mechanical Test Cap Assembly (Previously Z1210-29) Finishing Frame for Siphon Jet System (For Blowout System specify -45-B) (Previously Z1210-45) "ZZ" Coupling Wrench	
	-VL	Left Ha	nd Vent Connection	REV.	Α		DATE: 09/06/11	C.N. NO. 122065
*REGULARI YEURNISHEDUNI ESSOTHERWISE SPECIFIED				DWG	DWG. NO. 57306		PRODUCT NO. Z1204-ND-A	