




# Z1186-ST-106

SIZE 500 OIL INTERCEPTOR W/ INTEGRAL STORAGE TANK AND 6[152] INLET/OUTLET SIZE

SPECIFICATION SHEET

TAG \_\_\_\_\_

Dimensional Data (inches and [mm]) are Subject to Manufacturing Tolerances and Change Without Notice

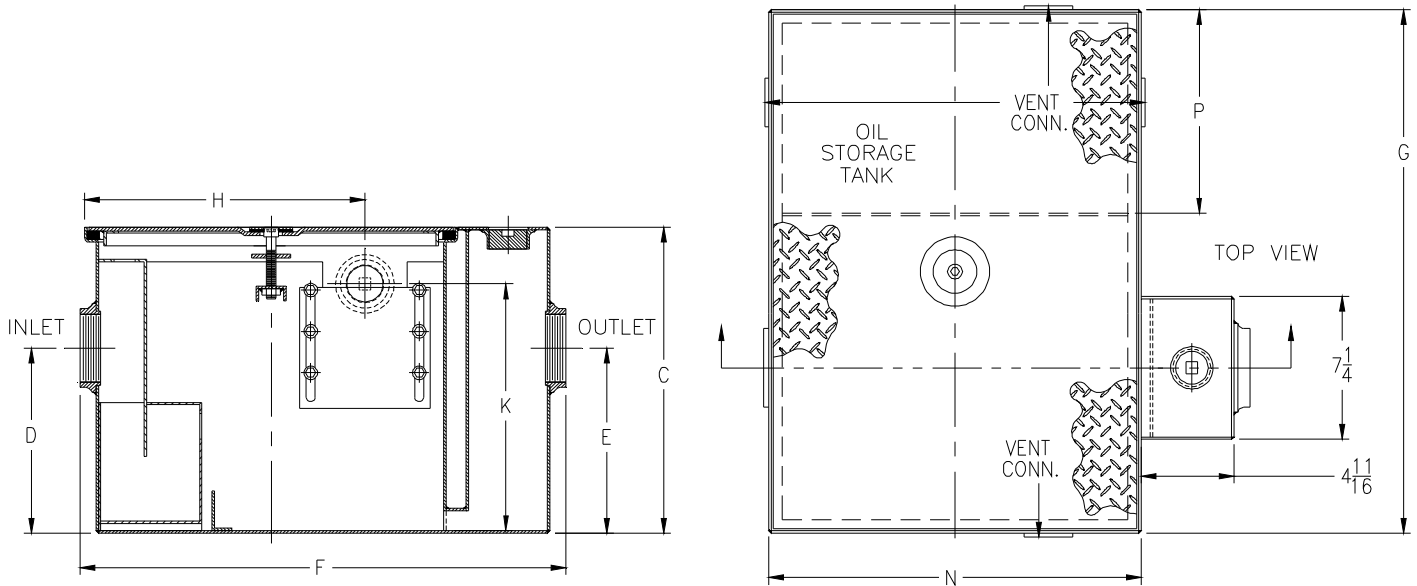

SIZE	Inlet/Outlet Size	Flow Rate G.P.M.	Water Capacity Gal.[L]	Approx. Wt. Lbs.[kg]	P
500	6 [152]	20 [91]	10 [38]	115 [52]	10-5/16 [262]

Dimensions in inches [mm]								Oil Storage Tank Capacity Gal.[L]	No. of Covers
SIZE	C	D/E	F	G	H	K	N		
500	15-1/2 [394]	9-3/8 [238]	25-1/16 [637]	26-1/4 [667]	14-1/16 [357]	12-1/2 [318]	18-7/8 [479]	125 [473]	3

**ENGINEERING SPECIFICATION:** ZURN Z1186-ST-106

Acid Resistant Coated interior and exterior fabricated steel oil interceptor, with bronze cleanout plug and visible double wall trap seal, removable combination pressure equalizing/flow diffusing baffle and sediment bucket, oil drawoff, vent connections, secured gasketed non-skid cover, complete with flow control fitting and left hand integral storage tank. Regularly furnished with inlet and outlet in high position. Note: location of outlet from bottom of interceptor cannot be changed.

**OPTIONS** (Check/specify appropriate options)

**PREFIXES**

\_\_\_\_\_ **Z** Acid Resistant Coated Fabricated Steel\*

**SUFFIXES**

- \_\_\_\_\_ **-E** Acid Resistant Coated interior and exterior fabricated steel section. (Specify 'C' Dim. required) for recessed installation
- \_\_\_\_\_ **-HD** Heavy duty traffic cover rated at 10,000 lbs. maximum safe live load.
- \_\_\_\_\_ **-K** Anchor flange 1 3/4 [44] down from top and 2 [51] wide. A 3 [76] minimum extension height is required when anchor flange (-K) option is specified. (Specify 'C' Dim. height required.)
- \_\_\_\_\_ **-KC** Anchor flange 1 3/4 [44] down from top and 2 [51] wide with clamp collar.
- \_\_\_\_\_ **-STR** Storage tank on right hand side when facing the inlet.

\* Regularly furnished unless otherwise specified.