Z415B-104

BODY ASSEMBLY W/ "TYPE "B"
STRAINER, EXTENSION & TOP-SET® DECK PLATE

SPECIFICATION SHEET

TAG _____

Dimensional Data (inches and [mm]) are Subject to Manufacturing Tolerances and Change Without Notice

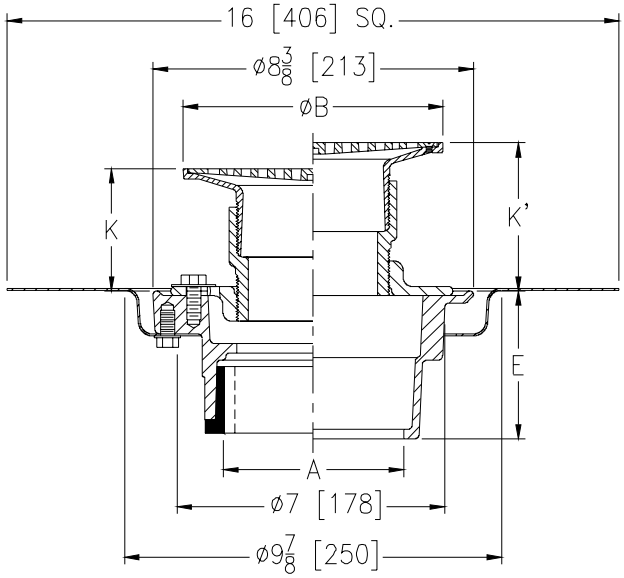

Dimensions In Inches						Approx. Wt. Lbs. [kg]	Strainer Open Area Sq. In. [cm²]
A - Pipe Size	B Strainer Dia.	K		K'			
		Min.	Max.	Min.	Max.		
2-3 [51-76]	5 [127]	2 7/16 [62]	4 1/8 [105]	3 3/8 [86]	5 1/16 [129]	11 [5]	8 [52]
2-3-4 [51-76-102]	6 [152]	2 3/4 [70]	4 3/8 [111]	3 11/16 [94]	5 5/16 [135]	13 [6]	9 [58]
2-3-4 [51-76-102]	7 [178]	3 1/16 [78]	4 3/4 [121]	4 [102]	5 11/16 [144]	14 [6]	12 [77]
3-4 [77-102]	8 [203]	3 1/16 [78]	4 3/4 [121]	4 [102]	5 11/16 [144]	16 [7]	18 [116]
6 [152]	8 [203]	3 1/16 [78]	4 3/4 [121]	4 [102]	5 11/16 [144]	18 [8]	18 [116]
6 [152]	10 [254]	3 7/16 [87]	5 1/8 [130]	4 3/8 [111]	6 1/16 [154]	22 [10]	26 [168]

ENGINEERING SPECIFICATION:
ZURN ZN415B-104
Floor and shower drain, Dura-Coated cast iron body with bottom outlet, combination invertible membrane clamp, extension adaptor and adjustable collar with "TYPE B" polished nickel bronze top, extension adapter and top-set® deck plate.

OPTIONS (Check/specify appropriate options)

PIPE SIZE	(Specify size/type) **OUTLET**		**'E' BODY HT. DIM.**
2 thru 4 [51 thru 102]	_____ IC	Inside Caulk	3 7/8 [98]
2 [51]	_____ IP	Threaded	2 3/8 [60]
3 [76]	_____ IP	Threaded	2 5/8 [67]
4 [102]	_____ IP	Threaded	2 7/8 [73]
6 [152]	_____ IP	Threaded	2 3/4 [70]
2 thru 4 [51 thru 102]	_____ NH	No-Hub	3 7/8 [98]
2 thru 4 [51 thru 102]	_____ NL	Neo-Loc	4 5/8 [117]

PREFIXES

_____ ZB D.C.C.I. Body Assembly w/ Polished Bronze Top
_____ ZN D.C.C.I. Body Assembly w/ Polished Nickel Bronze Top*

SUFFIXES

_____ -AA All Acid Resisting Epoxy
_____ -AR Acid Resisting Epoxy Coated Cast Iron
_____ -CP Chrome-Plated Top
_____ -DP Decorative Polished Top
_____ -EF 3/16 [5] Extension Frame (5 - 6 [127-152] Sizes Only)
_____ -G Galvanized Cast Iron
_____ -HD Heavy-Duty Slotted Grate (ZN 5 - 6 [127-152] Sizes Only)
_____ -OF Z329-7 Funnel (6 - 10 [152 - 254] Dia. Top Only)
_____ -P Trap Primer Connection (Specify 1/2 [13] or 3/4 [19])
_____ -TC Neo-Loc Test Cap Gasket (2 - 4 [51 - 102] NL Bottom Outlet Only)

_____ -V Backwater Valve
_____ -VP Vandal-Proof Secured Top
_____ -W Winder Closure Plug
_____ -Y Sediment Bucket
_____ -4 4 [102] Diameter Funnel (Z328)
_____ -90 2 or 3 [5 or 75] Side Outlet Body Outlet Body Assembly Only)

*REGULARLY FURNISHED UNLESS OTHERWISE SPECIFIED

REV. DATE: 8/31/05 C.N. NO. 93744

DWG. NO. P-15195 PRODUCT NO. Z415B-104

ZURN INDUSTRIES, INC. ♦ SPECIFICATION DRAINAGE OPERATION ♦ 1801 Pittsburgh Ave. ♦ Erie, PA 16514
Phone: 814/455-0921 ♦ Fax: 814/454-7929 ♦ World Wide Web: www.zurn.com
In Canada: ZURN INDUSTRIES LIMITED ♦ 3544 Nashua Drive ♦ Mississauga, Ontario L4V1L2 ♦ Phone: 905/405-8272 Fax: 905/405-1292