




Z1108-78

GREASE INTERCEPTOR FLOW CONTROL ACCESS BOX

SPECIFICATION SHEET

TAG _____

Dimensional Data (inches and [mm]) are Subject to Manufacturing Tolerances and Change Without Notice

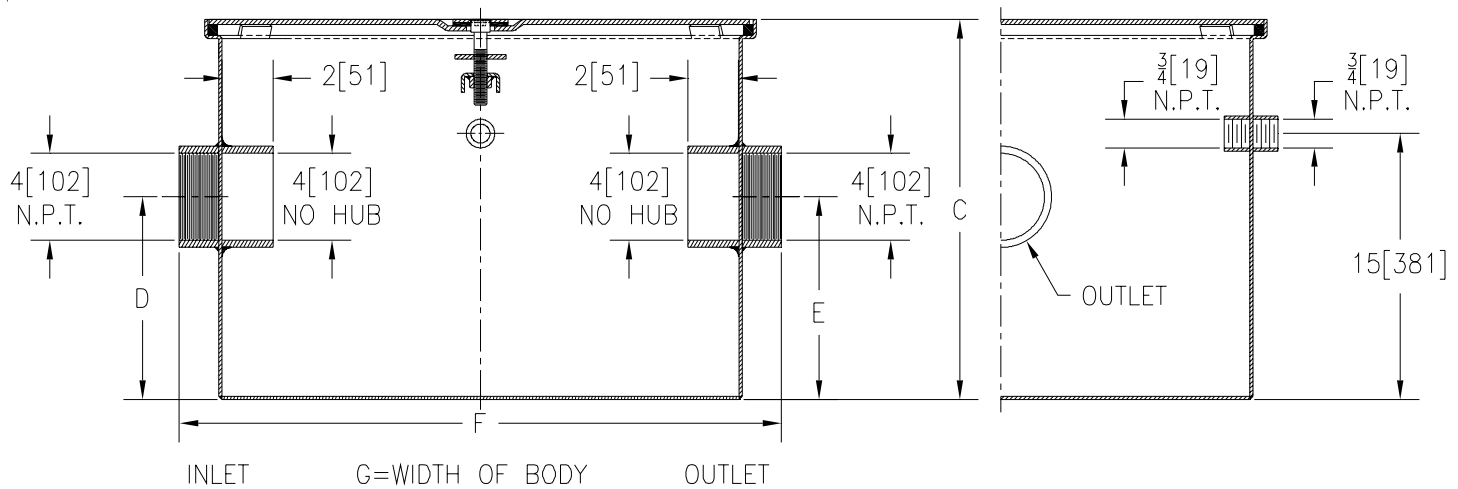

Inlet/ Outlet Size**	Approx. Wt. Lbs. [kg]	Dimensions in Inches			
		C	D/E	F	G
4 [102]	117 [53]	20 [432]	10 [254]	26 1/8 [664]	19 7/8 [505]

ENGINEERING SPECIFICATION: ZURN Z1108-78 Acid Resistant Coated interior and exterior fabricated steel access box complete with gasketed non-skid secured cover with center tie down assembly.

PREFIXES

_____ Z Acid Resistant Coated Fabricated Steel*

SUFFIXES

- _____ -E Acid Resistant Coated Interior and exterior fabricated steel integral extension section. (Specify 'C' Dim. required) for recessed installation.
- _____ -HD Heavy Duty Cover.
- _____ -K Anchor flange 1 3/4 [44] down from top and 2 [51] wide.
- _____ -KC Anchor flange 1 3/4 [44] down from top and 2 [51] wide with clamp collar.
- _____ -T Cover recessed for tile/terrazzo. (Specify required recess depth - 1/8 [3], 3/4 [19], or 1 1/4 [32]).

REV.	DATE: 1/18/07	C.N. NO. 96078
DWG. NO. P-15368 PRODUCT NO. Z1108-78		

*REGULARLY FURNISHED UNLESS OTHERWISE SPECIFIED