




# Z460N

## SHALLOW BODY FLOOR DRAIN W/ SIDE OUTLET AND "TYPE N" STRAINER

SPECIFICATION SHEET

TAG \_\_\_\_\_

Dimensional Data (inches and [ mm ]) are Subject to Manufacturing Tolerances and Change Without Notice

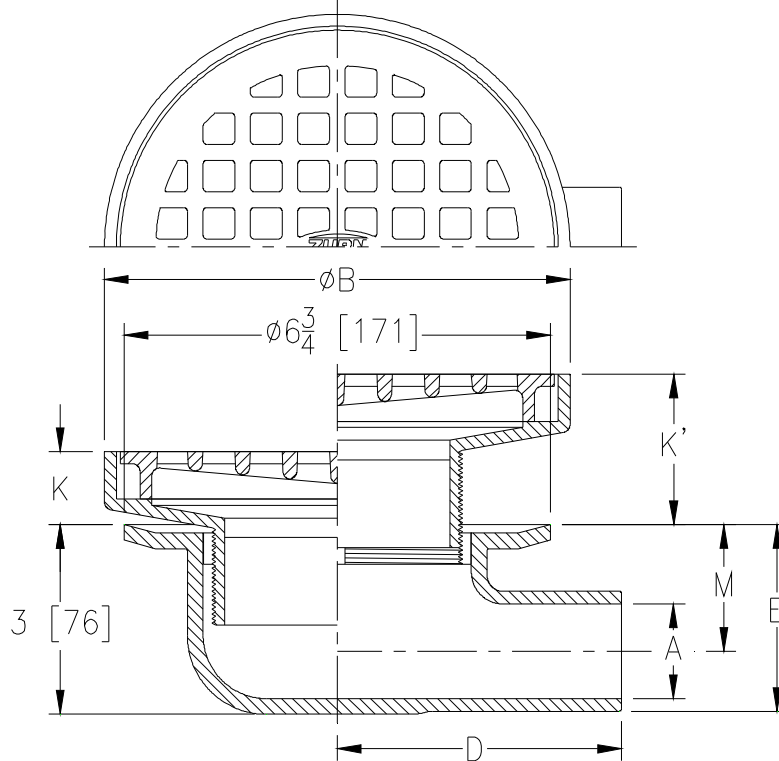

Dimensions In Inches [mm]					Approx. Wt. Lbs. [kg]	Strainer Open Area Sq. In. [cm <sup>2</sup> ]
A- Pipe Size Inches [mm]	B- Strainer	K Min.	K Max.	M		
1-1/2 [38]	7 [178]	1-5/32 [29]	2-3/8 [60]	2 [51]	14 [6]	12 [77]
2 [51]				1-25/32 [45]		
1-1/2 [38]	9 [229]	1-13/32 [36]	2-5/8 [67]	2 [51]	18 [8]	23 [148]
2 [51]				1-25/32 [45]		

**ENGINEERING SPECIFICATION: ZURN Z460N**

Shallow body floor and shower drain, Dura-Coated cast iron body with side outlet, seepage slots, and integral threaded connection for "TYPE N" D.C.C.I. secured light-duty strainer with deep flanged grate.

**OPTIONS** (Check/specify appropriate options)

PIPE SIZE	(Specify size/type) OUTLET	'D' DIM.	'E' BODY HT. DIM.
1-1/2 [38]	___ IP Threaded	3-1/4 [83]	3-5/32 [80]
2 [51]	___ IP Threaded	3-1/4 [83]	3-7/32 [82]
1-1/2 [38]	___ NH No-Hub	4-1/4 [114]	2-31/32 [75]
2 [51]	___ NH No-Hub	5 [127]	2-31/32 [75]

**PREFIXES**

- \_\_\_ Z D.C.C.I. Body Assembly w/ Dura-Coated Top\*
- \_\_\_ ZB D.C.C.I. Body Assembly w/ Polished Bronze Top
- \_\_\_ ZN D.C.C.I. Body Assembly w/ Polished Nickel Bronze Top

**SUFFIXES**

- \_\_\_ -C Clamp Collar
- \_\_\_ -DG Duresist Grate
- \_\_\_ -G Galvanized Cast Iron
- \_\_\_ -VP Vandal-Proof Secured Top

\* Regularly furnished unless otherwise specified.