



# Z1320-CXL-BFP


ECOLOTROL WALL HYDRANT  
WITH BACKFLOW PREVENTER

Encased, Non-Freeze, Anti-Siphon, Automatic Draining

SPECIFICATION SHEET

TAG \_\_\_\_\_

Dimensional Data (inches and [mm]) are Subject to Manufacturing Tolerances and Change Without Notice

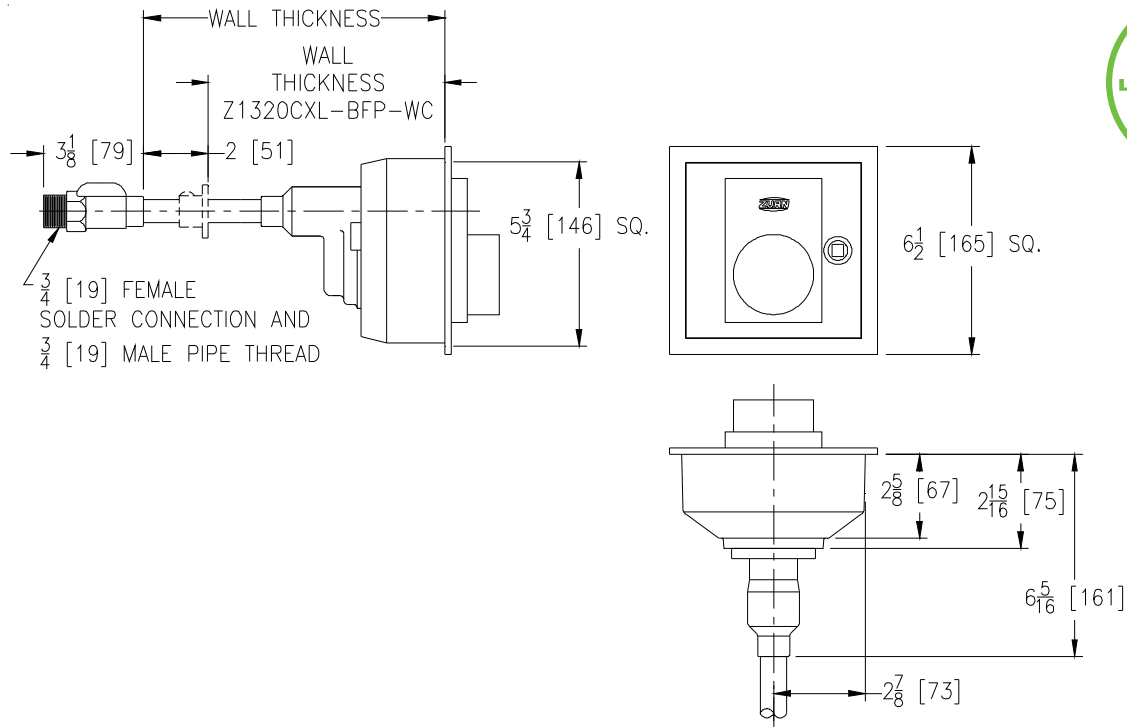

Wall Thickness in [mm]	Approx. Wt. lbs [kg]
6, 8 [152, 203]	5 [2]
10, 12, 14, 16 [254, 305, 356, 406]	6 [3]
18, 20, 22, 24 [457, 508, 559, 610]	8 [4]

## ENGINEERING SPECIFICATION: ZURN Z1320-CXL-BFP

Encased, Ecolotrol™, lead-free, non-freeze automatic draining wall hydrant for flush installation. Hydrant features integral backflow preventer with anti-siphon technology, copper casing, bronze and stainless steel interior components, non-turning operating rod with free-floating compression closure valve, combination 3/4" [19] female solder and 3/4" [19] male pipe thread inlet connection, and Z1399XL-BFP external backflow preventer with dual independent back checks and 3/4" [19] male hose connection. Hydrant furnished with chrome-plated rough cast bronze housing with locking hinged cover stamped "WATER" and includes operating key.

*Zurn "XL" Lead-Free compliant products are a line of durable plumbing products designed and manufactured to comply with state laws and local codes that mandate maximum allowable lead content levels. Zurn "XL" products are manufactured in accordance to the Federal SWDA section 1417.*

## OPTIONS (Check/specify appropriate options)

### SUFFIXES

- \_\_\_ -CL Cylinder Lock
- \_\_\_ -RA2 12 [305] Wall Rod Assembly with Repair Kit (-RK)
- \_\_\_ -RA4 24 [610] Wall Rod Assembly with Repair Kit (-RK)
- \_\_\_ -RK Hydrant Parts Repair Kit (HYD-RK-Z1321-CXL)
- \_\_\_ -WC Wall Clamp
- \_\_\_ -34EL 3/4 [19] 90° Solder Inlet Elbow
- \_\_\_ -34FIP 3/4 [19] IP Straight Female Inlet Adapter

\* Regularly furnished unless otherwise specified.