




Z610-SA

12-1/2 [318] SQUARE TOP HEAVY-DUTY DRAIN WITH STABILIZER ASSEMBLY

SPECIFICATION SHEET

TAG _____

Dimensional Data (inches and [mm]) are Subject to Manufacturing Tolerances and Change Without Notice

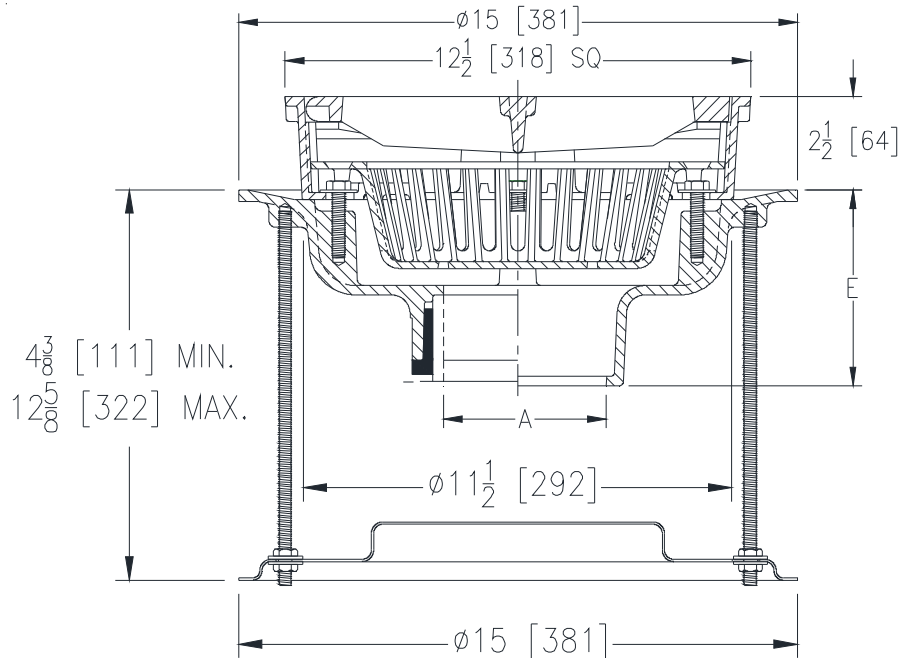

A Pipe Size In.[mm]	Approx. Wt. Lbs. [kg]	Grate Open Area Sq. In. [cm ²]
2, 3, 4 [51, 76, 102]	54 [24]	42 [271]

ENGINEERING SPECIFICATION: ZURN Z610-SA

12-1/2" [305mm] Square top drain, Dura-Coated cast iron body with bottom outlet, seepage pan and combination membrane flashing clamp and frame for heavy-duty cast iron loose slotted grate, with suspended polypropylene sediment bucket. Complete with Z1036 stabilizer assembly.

OPTIONS (Check/specify appropriate options)

PIPE SIZE

2, 3, 4 [51, 76, 102]

2, 3, 4 [51, 76, 102]

(Specify size/type) OUTLET

___ NH No-Hub
___ NL Neo-Loc

'E' BODY HT. DIM.

5-1/4 [133]

4-5/8 [117]

PREFIXES

___ Z D.C.C.I. Body and Top*
___ ZB D.C.C.I Body w/Polished Bronze Top (Add 3/16 [5] to 2-1/2 [64] Dim. and 3/4 [19] to 12-1/2 [318] Dim.)
___ ZN D.C.C.I Body w/Polished Nickel Bronze Top (Add 3/16 [5] to 2-1/2 [64] Dim. and 3/4 [19] to 12-1/2 [318] Dim.)

SUFFIXES

___ -AR	Acid Resistant Epoxy Coated Cast Iron	___ -P	Trap Primer Connection
___ -DG	Duresist Grate	___ -S	Secondary Strainer
___ -DS	Ductile Iron Solid Cover	___ -SC	Solid Cover
___ -DX	Dex-o-tex Flange (ZB, ZN Only)	___ -SS	Stainless Steel Mesh Liner for Bucket
___ -F	2 [51] High Extension	___ -TC	Neo-Loc Test Cap Gasket (2, 3, 4 [51, 76, 102] NL Bottom Outlet Only)
___ -G	Galvanized Cast Iron	___ -TS	Top Secured with Slotted Screws
___ -H	Hinged Grate	___ -VP	Vandal-Proof Secured Top
___ -HC	Hinged Solid Cover	___ -YA	Aluminum Sediment Bucket
___ -HL	Hinged Locking Grate	___ -YC	Cast Iron Sediment Bucket
___ -HLC	Hinged Locking Cover		
___ -LY	(Less) Sediment Bucket		

* Regularly furnished unless otherwise specified.