




Z1170-129

SPECIFICATION SHEET

GREASE INTERCEPTOR W/INTEGRAL EXTENSION, RECESSED COVER FOR 3/16 [5] TILE/TERRAZZO & DEX-O-TEX FLANGE

TAG _____

Dimensional Data (inches and [mm]) are Subject to Manufacturing Tolerances and Change Without Notice

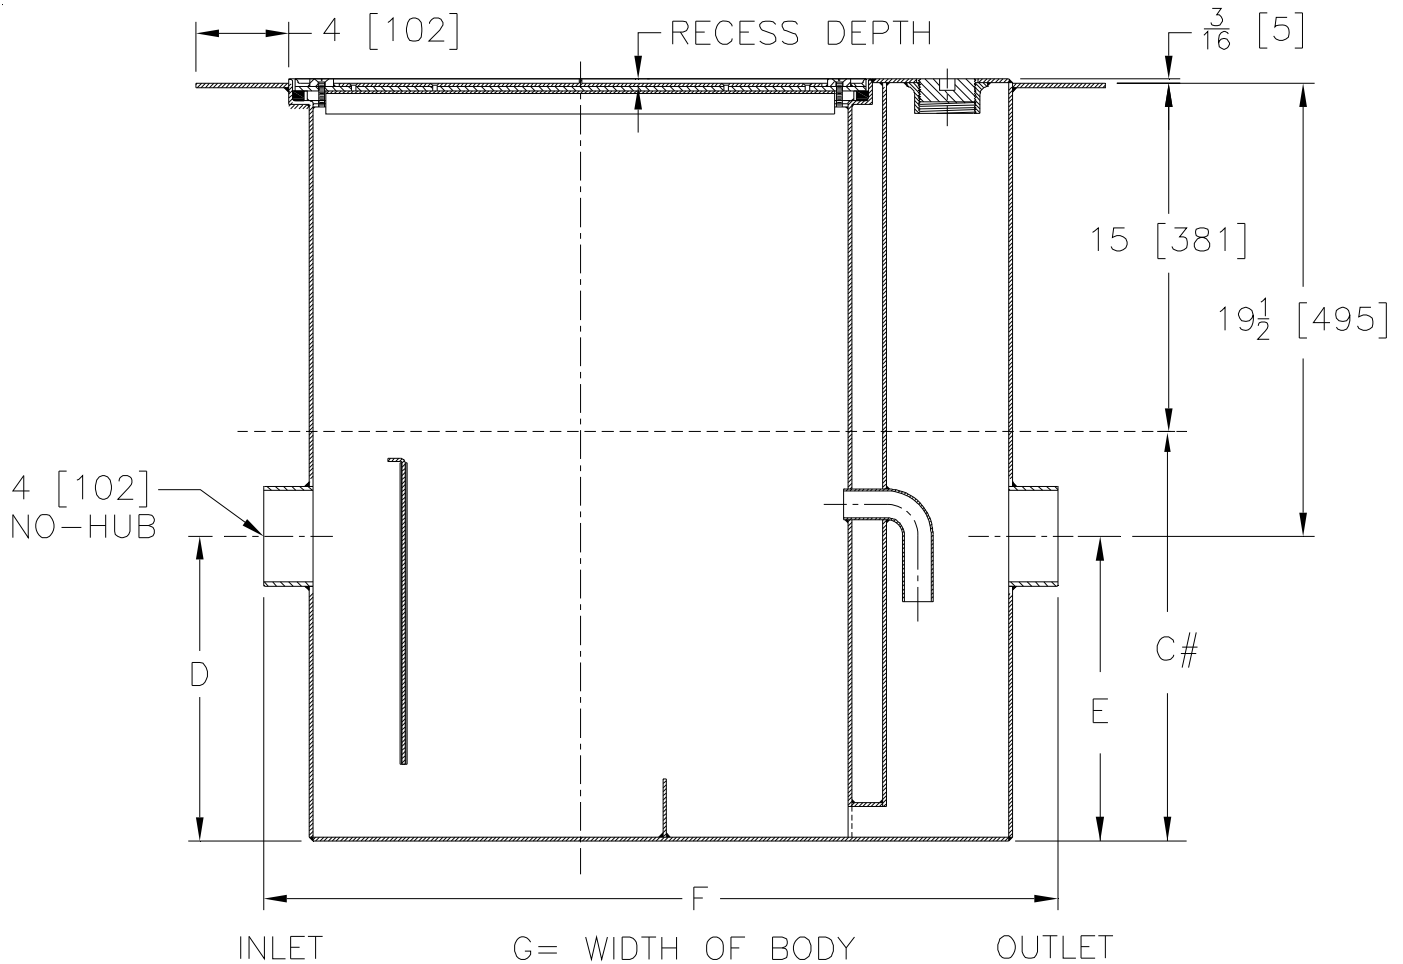

Size	Inlet/Outlet Size	Flow Rate GPM. [L]	Capacity		Approx. Wt. Lbs. [kg]	Dimensions in Inches			
			Water Gal. [L]	Grease Lbs. [kg]		C	D/E	F	G
600	4 [102]	25 [94]	21 [79]	50 [23]	170 [77]	17 [432]	12 1/2 [318]	32 1/4 [819]	19 7/8 [505]

ENGINEERING SPECIFICATION: ZURNZ1170-129

Acid Resistant Coated interior and exterior fabricated steel grease interceptor. Rated at ____ GPM and ____ Lbs. grease capacity, with internal air relief by-pass, bronze cleanout plug and visible double wall trap seal with removable combination pressure equalizing/flow diffusing baffle, gasketed recessed cover for 3/16 [5] tile/terrazzo and DEX-O-TEX flange. Complete with acid resistant coated interior and exterior fabricated steel integral extension section. Regularly furnished with a high inlet and outlet connection. Note: Location of outlet from bottom of interceptor cannot be changed.

PREFIXES

____ Z Acid Resistant Coated Fabricated Steel*

'C' dimension is standard interceptor height. Add extension height required to obtain overall 'C' as specified.

REV. A	DATE: 08/15/08	C.N. NO. 98986
DWG. NO. P-15586	PRODUCT NO. Z1170-129	

*REGULARLY FURNISHED UNLESS OTHERWISE SPECIFIED