




# Z-100-144 15" DIAMETER MAIN ROOF DRAIN

TAG \_\_\_\_\_

Dimensional Data (inches and [ mm ]) are Subject to Manufacturing Tolerances and Change Without Notice

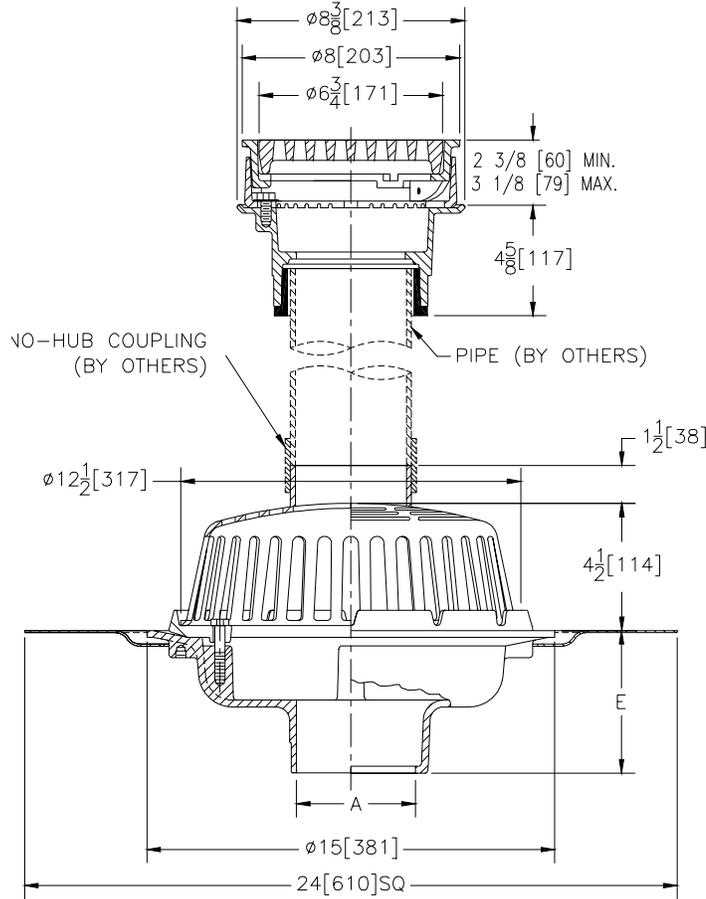

**ENGINEERING SPECIFICATION:** ZURN Z-100-144 15[381] Diameter roof drain. Dura-Coated cast iron body with combination membrane flashing clamp/ gravel guard, low silhouette dome, roof sump receiver in combination with upper floor drain, Dura coated cast iron body with bottom outlet, seepage pan and combination membrane flashing clamp, and frame for adjustable extension with heavy duty slotted cast iron grate.

A- Pipe Size In.	Approx. Wt. Lbs.[kg]	Grate Open Area Sq. In.[cm <sup>2</sup> ]
2,3,4 [50,75,100]	60 [27]	11[71]
6 [152]	61 [28]	

**SUFFIXES**

- \_\_\_\_\_ -BS Bronze Mesh Screen Over Dome
- \_\_\_\_\_ -E Static Extension 1[25] thru 4[100] (Specify Height)
- \_\_\_\_\_ -EA Adjustable Extension Assembly 1 3/4[44] thru 3 1/2[89]
- \_\_\_\_\_ -G Galvanized Cast Iron
- \_\_\_\_\_ -GD Galvanized Cast Iron Dome
- \_\_\_\_\_ -S Secondary Clamp Collar
- \_\_\_\_\_ -XJ Vertical Expansion Joint (See Z-190)

**OPTIONS** (Check/specify appropriate options)

**PREFIXES**

- \_\_\_\_\_ Z- D.C.C.I. Body and Grate\*
- \_\_\_\_\_ ZN- D.C.C.I. Body with Polished Nickel Bronze Grate (Add 3/16 [5] to 2 [51] Dim.)

**OUTLET** (Specify type)

- \_\_\_\_\_ IC Inside Caulk
- \_\_\_\_\_ IG Inside Caulk w/Sealtrol Gskt.
- \_\_\_\_\_ IP Threaded
- \_\_\_\_\_ NH No-Hub
- \_\_\_\_\_ NL Neo-Loc

**PIPE SIZE** (Specify size)

- \_\_\_\_\_ 2,3,4,6 [50,75,100,150]
- \_\_\_\_\_ 2,3,4,6 [50,75,100,150]
- \_\_\_\_\_ 2 thru 6 [50 thru 150]
- \_\_\_\_\_ 2,3,4,6 [50,75,100,150]
- \_\_\_\_\_ 2 thru 6 [50 thru 150]

**'E' BODY HT. DIMENSION**

- 5 1/4 [133]
- 5 1/4 [133]
- 3 3/4 [95]
- 5 1/4 [133]
- 4 5/8 [117]

<b>REV.</b>	<b>DATE: 9/5/97</b>	<b>C.N. NO. 78457</b>
<b>DWG. NO. P-14514 PRODUCT NO. Z-100-144</b>		

\*REGULARLY FURNISHED UNLESS OTHERWISE SPECIFIED