




Z-1186-90 OIL INTERCEPTOR W/ INTEGRAL STORAGE TANK

SPECIFICATION SHEET

TAG _____

Dimensional Data (inches and [mm]) are Subject to Manufacturing Tolerances and Change Without Notice

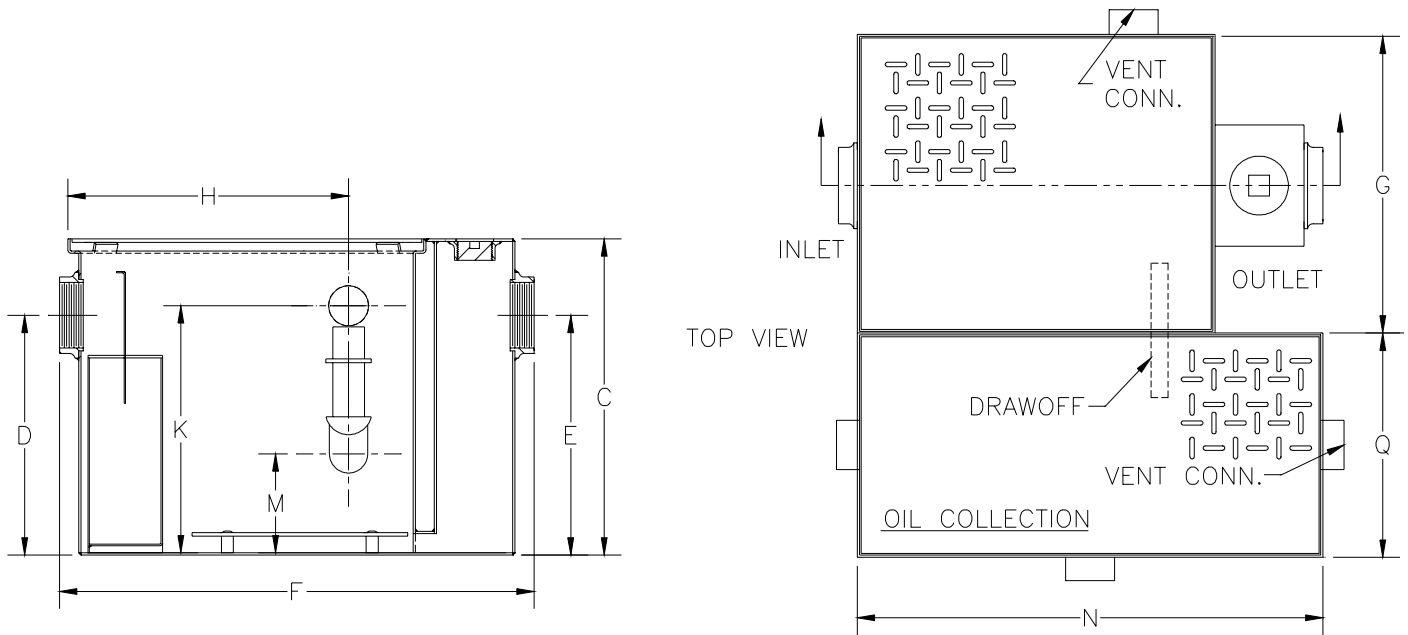

R= DEPTH OF STORAGE TANK

SIZE	Inlet/Outlet Size**	Flow Rate G.P.M.	Water Capacity Gal.[L]	Approx. Wt. Lbs.[kg]	Oil Storage Tank Capacity Gal.[L]
700	3 [76]	35 [132]	21 [79]	140 [47]	10 [38]

Dimensions in inches										
SIZE	C	D/E	F	G	H	K	M	N	Q	R
700	19 3/4 [483]	12 1/2 [318]	29 7/8 [759]	19 7/8 [505]	16 3/8 [416]	16 3/4 [425]	6 7/16 [164]	30 [762]	15 [381]	19 3/4 [502]

ENGINEERING SPECIFICATION: ZURN Z-1186-90 Acid Resistant Coated interior and exterior fabricated steel oil interceptor, with bronze cleanout plug and visible double wall trap seal, removable combination pressure equalizing/flow diffusing baffle and sediment bucket, horizontal baffle, oil drawoff, vent connections, secured gasketed non-skid cover, complete with flow control fitting and integral storage tank. Regularly furnished with inlet and outlet in high position.

OPTIONS (Check/specify appropriate options)

PREFIXES

- Z- Acid Resistant Coated Fabricated Steel*
- ** Inlet and outlet size shown indicates standard operating size and flow control setting. Size #700 will have connections reduced to 3 [76] as standard.
- 4"

REV.	DATE: 3/27/98	C.N. NO. 80139
DWG. NO. P-14609 PRODUCT NO. Z-1186-90		

*REGULARLY FURNISHED UNLESS OTHERWISE SPECIFIED