




# Z451-PC

## SHALLOW TRAP DRAIN W/ "TYPE B" STRAINER & PROTECTIVE COVER

SPECIFICATION SHEET

TAG \_\_\_\_\_

Dimensional Data (inches and [ mm ]) are Subject to Manufacturing Tolerances and Change Without Notice

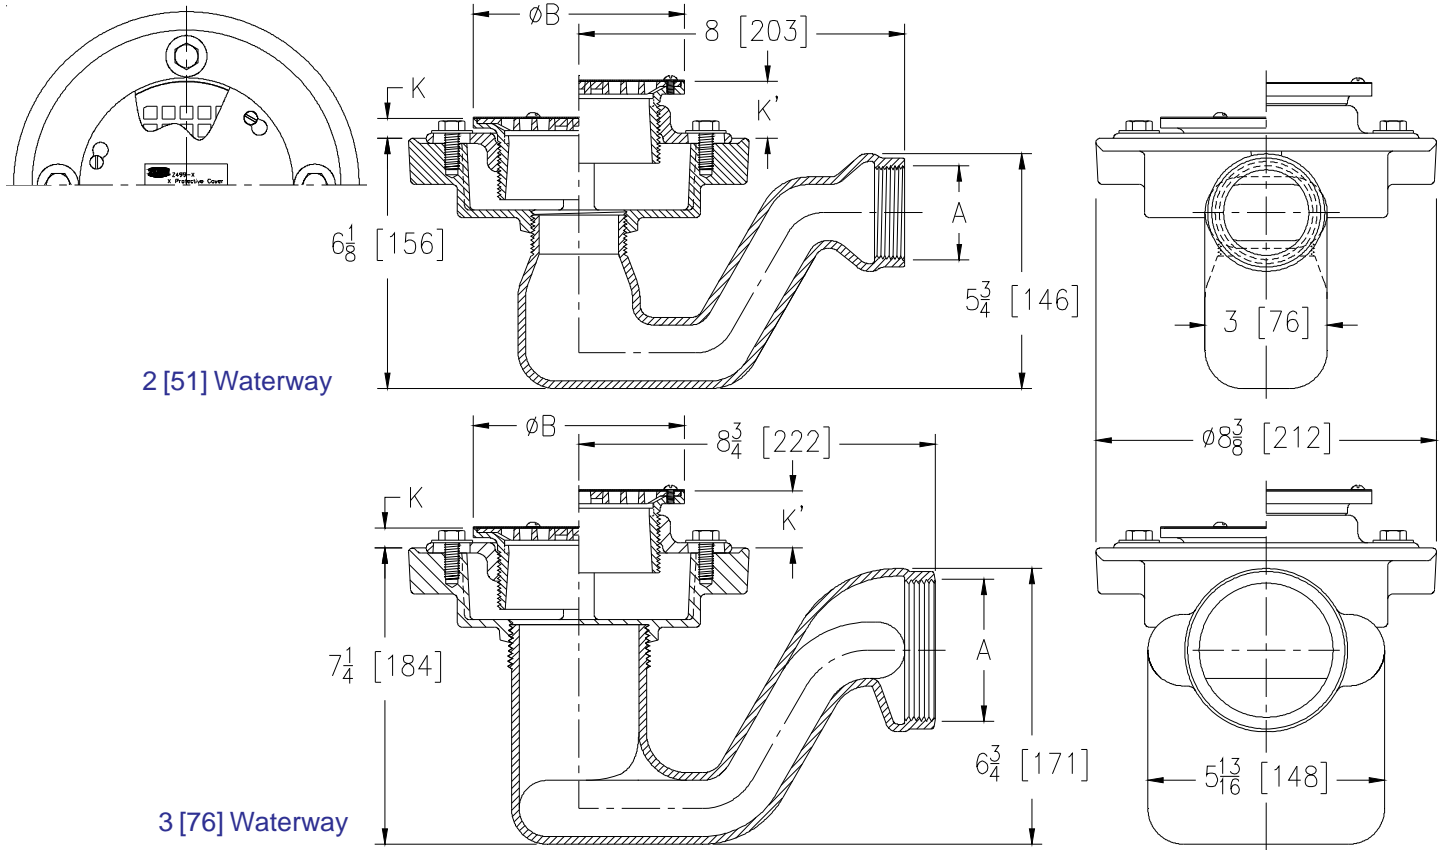

Dimensions In Inches [mm]						Approx. Wt. Lbs. [kg]	Strainer Open Area Sq. In. [cm <sup>2</sup> ] (After Removal of Protective Cover)
A Pipe Size	Strainer Dia.	K		K'			
		Min.	Max.	Min.	Max.		
2, 3 [51, 76]	5 [127]	1 [25]	1-1/2 [38]	1-3/32 [28]	2-1/4 [57]	15 [7]	8 [52]
2, 3 [51, 76]	6 [152]	1 [25]	1-25/32 [45]	1-13/32 [36]	2-17/32 [64]	18 [8]	9 [58]
2, 3 [51, 76]	7 [178]	1 [25]	2-1/8 [54]	1-23/32 [44]	2-7/8 [73]	20 [9]	12 [77]
3 [51]	8 [203]	1-5/32 [30]	2-1/8 [54]	1-3/4 [44]	2-7/8 [73]	21 [10]	18 [116]

**ENGINEERING SPECIFICATION:**

ZURN ZN451-PC  
Shallow trap floor and shower drain, Dura-Coated cast iron body with bottom outlet, combination invertible membrane clamp and adjustable collar with seepage slots, adjustable "TYPE B" polished, nickel bronze heel-proof strainer, galvanized steel construction protective cover and cast iron shallow trap body with 2" or 3" [51mm or 76mm] waterway and threaded side outlet.

**OPTIONS** (Check/specify appropriate options)

**PIPE SIZE** 2, 3 [51, 76] (Specify size) **OUTLET** \_\_\_\_\_ IP Threaded

**PREFIXES**  
 \_\_\_\_\_ ZB D.C.C.I. Body Assembly w/ Polished Bronze Top  
 \_\_\_\_\_ ZN D.C.C.I. Body Assembly w/ Polished Nickel Bronze Top\*

**SUFFIXES**  
 \_\_\_\_\_ -CP Chrome-Plated Bronze Top  
 \_\_\_\_\_ -G Galvanized Cast Iron  
 \_\_\_\_\_ -P Trap Primer Connection (Specify 1/2 [13] or 3/4 [19])  
 \_\_\_\_\_ -U 1-3 [25-76] High Extension Adapter  
 \_\_\_\_\_ -V Backwater Valve  
 \_\_\_\_\_ -VP Vandal-Proof Secured Top  
 \_\_\_\_\_ -Y Sediment Bucket

\* Regularly furnished unless otherwise specified.