
Z1325-VB

SPECIFICATION SHEET

WALL HYDRANT Encased, Vari-Temp, Non-Freeze with Vacuum Breaker

TAG

Dimensional Data (inches and [mm]) are Subject to Manufacturing Tolerances and Change Without Notice

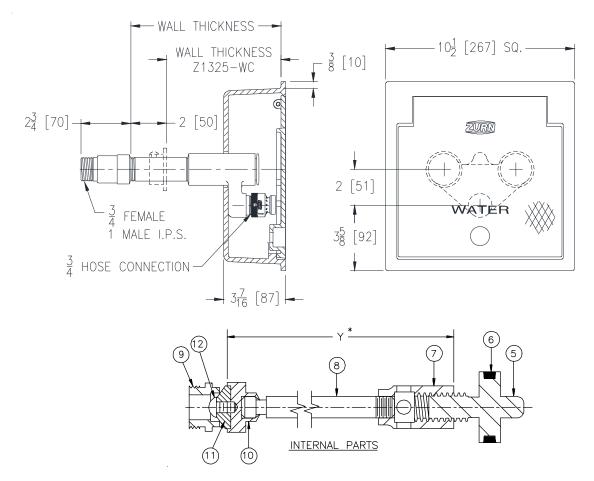

Wall Thickness Inches [mm]	Approx. Wt. Lbs. [kg]	
6, 8 [152, 203]	27 [12]	
10, 12, 14 [254, 305, 356]	31 [14]	
16, 18 [406, 457]	35 [16]	
24 [610]	39 [18]	

SUFFIXES

-CL -NW -PB -RA4 -RK -WC -34UN

ENGINEERING SPECIFICATION: ZURN Z1325-VB

"Vari-Temp" combination hot and cold water, non-freeze, encased wall hydrant for flush installation. Complete with bronze casing, all bronze interior parts, non-turning operating rods with free-floating compression closure valves, replacable bronze seat and seat washer, and combination 3/4" female or 1" male straight IP inlet and vacuum breaker. Nickel bronze box and hinged cover with operating key lock and "WATER" cast on cover.

NOTE: When (-VB) vacuum breaker suffix is specified, the vacuum breaker must be manuallytripped at the end of usage to facilitate drainage of the hydrant and maintain the non-freeze feature.

OPTIONS (Check/specify appropriate options)

ltem	<u>Name</u>	Quan.
<u>5</u>	Operating Screw	<u>2</u>
<u>6</u>	<u>O-Ring</u>	<u>2</u>
<u>7</u>	Operating Coupling	<u>2</u>
<u>8</u>	Operating Rod	<u>2</u>
<u>9</u>	<u>Removable Seat</u>	<u>2</u>
<u>10</u>	<u>Washer Guide</u>	<u>2</u>
<u>11</u>	<u>Washer (neoprene)</u>	<u>2</u>
<u>12</u>	<u>Screw</u>	<u>2</u>
	5 6 7 8 9 <u>10</u> 11	5Operating Screw6O-Ring7Operating Coupling8Operating Rod9Removable Seat10Washer Guide11Washer (neoprene)

* Regularly furnished unless otherwise specified.