


## Z1172-87 LARGE CAPACITY GREASE INTERCEPTOR WITH OFFSET OUTLET

**SPECIFICATION SHEET** 

TAG

Dimensional Data (inches and [ mm ]) are Subject to Manufacturing Tolerances and Change Without Notice

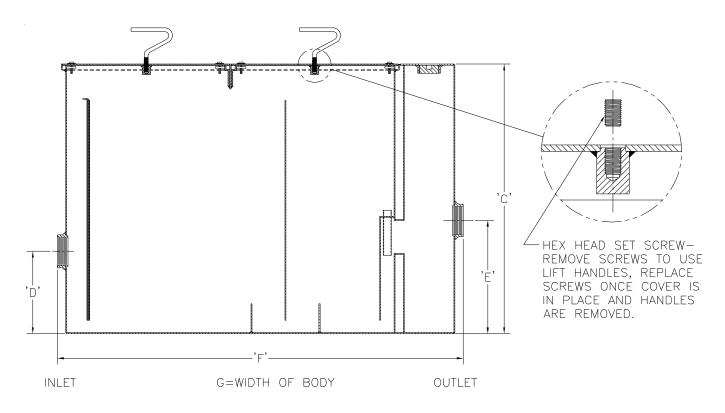

			Cap	acity	Number	Approx.					
Size	liniet/Clutieti	Flow Rate	Water	Grease	Number	Wt. Lbs.					
		G.P.M. [L]	Gal.[L]	Lbs. [Kg.]	ofCovers	[Kg.]	С	D	E	F	G
1100	3 [76]	125 [472]	150 [567]	250[114]	2	749 [340]	32 3/4 [832]	10 [254]	13 3/4 [349]	49 1/4 [1251]	40 [1016]

## ENGINEERING SPECIFICATION: ZURN Z1172-87

Large capacity Acid Resistant Coated interior and exterior fabricated steel grease interceptor, rated at \_\_\_\_\_ GPM and \_\_\_\_ Lbs. grease capacity, with internal air relief by-pass, bronze cleanout plug and visible double wall trap seal with removable pressure equalizing/flow diffusing baffle. Gasketed non-skid secured covers with removable lift handles and enzyme port having bronze plug, complete with flow control fitting. Regularly furnished with inlet and outlet in high position.

**OPTIONS** (Check/specify appropriate options)

## PREFIXES

Z Acid Resistant Coated Fabricated Steel\*

## SUFFIXES

Acid Resistant Coated exterior fabricated steel extension section. (Specify 'C' Dim. required) for recessed installation.

- \_\_\_\_-HD
- \_\_\_\_-К \_\_\_\_-КС
- Heavy duty traffic cover rated at 10,000 lbs. [4536 Kg.] maximum safe live load. Anchor flange 1-3/4 [44] down from top and 2 [51] wide. No extension height required to accommodate (-K) option.

Anchor flange 1-3/4 [44] down from top and 2 [51] wide with clamp collar. No extension is required to accommodate (-KC) option.

	REV. A	DATE: 08/10/06	C.N. NO. 95424							
*REGULARLY FURNISHED UNLESS OTHERWISE SPECIFIED	DWG. NO.	. P-14147 PI	RODUCT NO. Z1172-87							
ZURN INDUSTRIES, LLC.   SPECIFICATION DRAINAGE OPERATION   1801 Pittsburgh Ave.   Frie, PA 16514 Phone: 814\455-0921   Fax: 814\454-7929   World Wide Web: www.zurn.com										

In Canada: ZURN INDUSTRIES LIMITED + 3544 Nashua Drive + Mississauga, Ontario L4V1L2 + Phone: 905/405-8272 Fax: 905/405-1292