




Z1170-UN-76

RECESSING RECEIVER FOR 35 GPM GREASE INTERCEPTOR W/USER NOTIFICATION SYSTEM

SPECIFICATION SHEET

TAG _____

Dimensional Data (inches and [mm]) are Subject to Manufacturing Tolerances and Change Without Notice

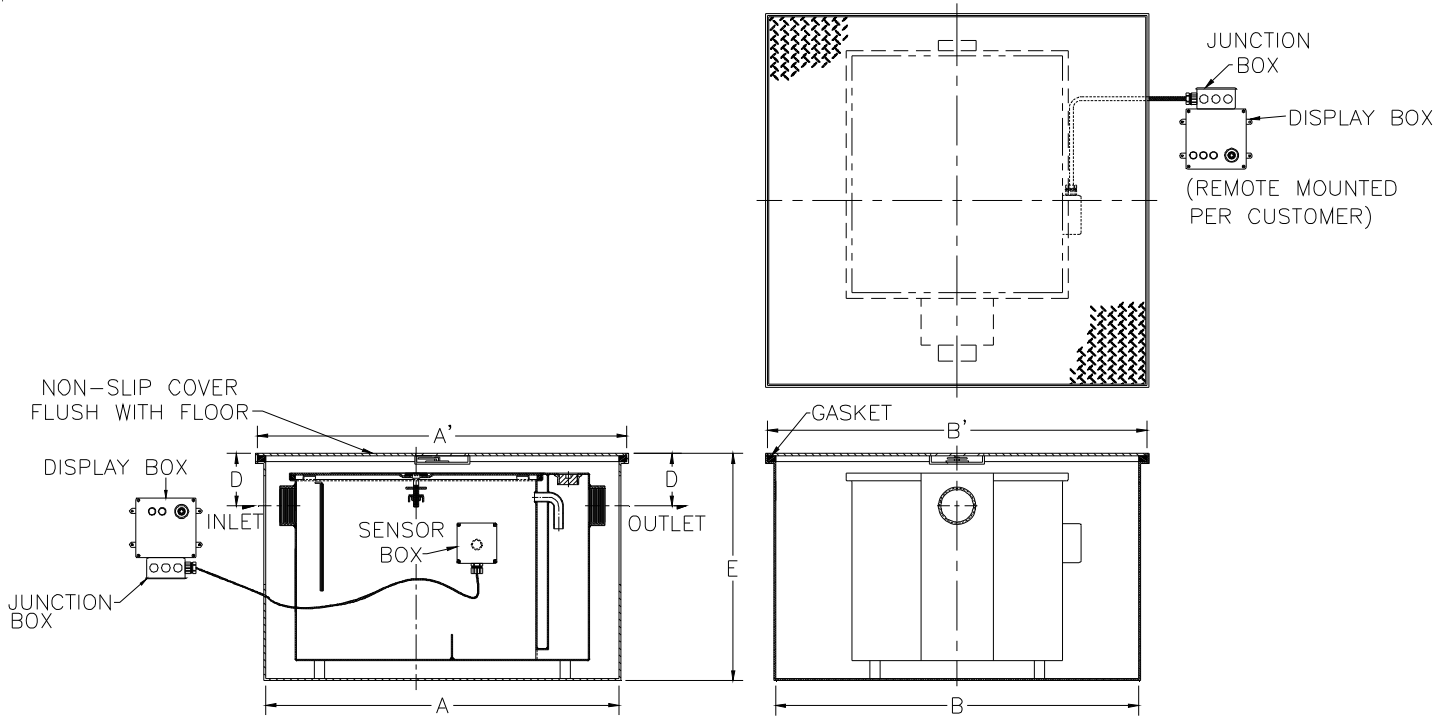

Size	Dimension in Inches					
	A	A'	B	B'	D	E
700	35 [889]	37 [940]	36 [914]	38 [965]	6-1/2 [165]	22-3/4 [578]

ENGINEERING SPECIFICATION: ZURN Z1170-UN-76

Acid Resistant Epoxy Coated Recessing receiver, enclosed type and gasketed non-skid cover with recessed and covered lift handle. Complete with Z1170-UN-700 Grease Interceptor. For interceptor specifications see Z1170-UN specification sheet.

PREFIXES

— **Z** Acid Resistant Coated Fabricated Steel*

SUFFIXES

- **-K** Anchor flange 1-3/4 [44] down from top and 2 [51] wide. A 3 [76] minimum extension height is required when anchor flange (-K) option is specified.
- **-KC** Anchor flange 1-3/4 [44] down from top and 2 [51] wide with clamp collar. A 3 [76] minimum extension height is required when anchor flange (-KC) option is specified.
- **-T** Cover recessed for tile/terrazzo. A 3 [76] minimum extension height is required. (Specify required recess depth - 1/8 [3], 3/4 [19], or 1-1/4 [32]).

REV.	DATE: 03/28/12	C.N. NO. 124107
DWG. NO. 309313	PRODUCT NO. Z1170-UN-76	

*REGULARLY FURNISHED UNLESS OTHERWISE SPECIFIED