




# Z575-81

6 X 12 [152 X 305] MEDIUM-DUTY GUTTER DRAIN W/  
VENEER TOP

SPECIFICATION SHEET

TAG \_\_\_\_\_

Dimensional Data (inches and [ mm ]) are Subject to Manufacturing Tolerances and Change Without Notice

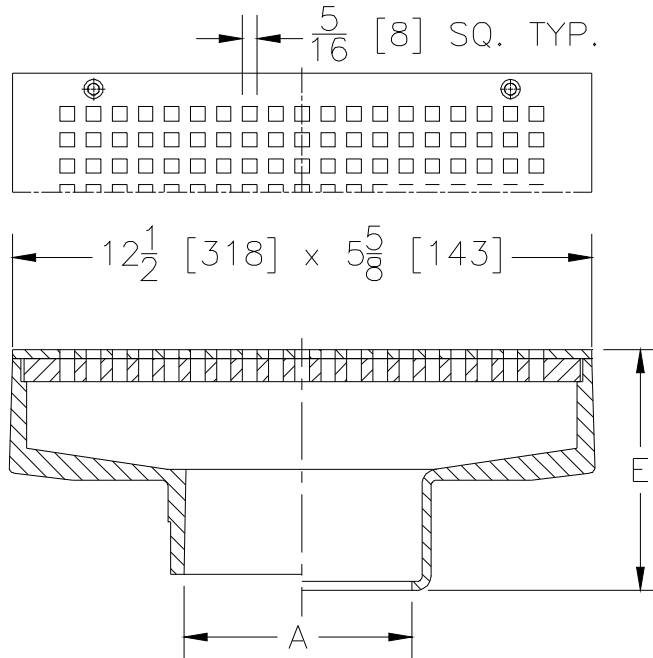

A-Pipe Size Inches [mm]	Approx. Wt. Lbs. [kg]	Grate Open Area Sq. In. [cm <sup>2</sup> ]
2,3,4 [51,76,102]	18 [8]	13 [84]

**ENGINEERING SPECIFICATION: ZURNZ575-81**  
6 x 12 [152 x 305] Top gutter drain, Dura-Coated cast iron body with bottom outlet, medium-duty cast iron waffle grate with nickel bronze veneer top.

**OPTIONS** (Check/specify appropriate options)

PIPE SIZE	(Specify size/type)	OUTLET	'E' BODY HT. DIM.
2, 3, 4 [51, 76, 102]	_____	IC Inside Caulk	5-3/16 [132]
2, 3, 4 [51, 76, 102]	_____	IG Inside Gasket	5-3/16 [132]
2, 3, 4 [51, 76, 102]	_____	IP Threaded	3-13/16 [97]
2, 3, 4 [51, 76, 102]	_____	NH No-Hub (IP w/Z1040)	-----
2, 3, 4 [51, 76, 102]	_____	NL Neo-Loc	4-11/16 [119]

**SUFFIXES**

- \_\_\_\_\_ -DG Duresist Grate
- \_\_\_\_\_ -G Galvanized Cast Iron
- \_\_\_\_\_ -K Seepage Pan
- \_\_\_\_\_ -KC Seepage Pan With Clamp Collar
- \_\_\_\_\_ -TC Neo-Loc Test Cap Gasket  
(2,3,4 [51,76,102] NL Bottom Outlet Only)
- \_\_\_\_\_ -TS Top Secured With Slotted Screws
- \_\_\_\_\_ -V Backwater Valve (See Z1099)
- \_\_\_\_\_ -VP Vandal-Proof Secured Top

\* Regularly furnished unless otherwise specified.