

Z1186-HT OIL INTERCEPTOR HOLDING TANK W/ CLEANOUT

TAG_____

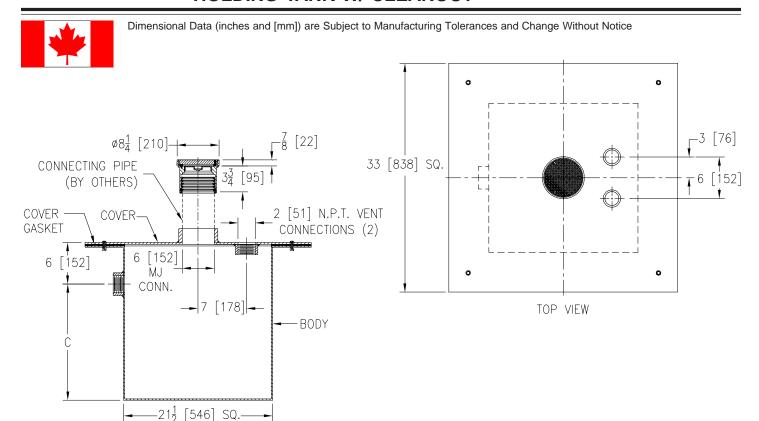

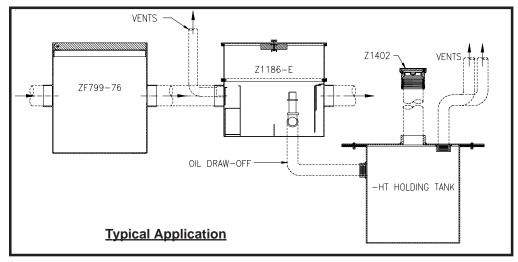

Size	С
300 & 400	18 [457]
500 & 600	24 [610]
700 & 800	30 [762]
Z1188-75	36 [914]
Z1188-100	48 [1219]
Z1188-150	75 [1905]
Z1188-200	100 [2540]
Z1188-250	125 [3175]

ENGINEERING SPECIFICATION: ZURN Z1186-HT Holding Tank prime coated steel body and gasketed cover with 2 [51] N.P.T. inlet connection, and two 2 [51] N.P.T. vent connections. Regularly furnished with Z1402 Floor Cleanout with 6 [152] Neo-Loc connection. Dura-Coated cast iron extended ferrule with secured gasketed plug, adjustable housing with frame and heavy-duty cover.

OPTIONS (Check/specify appropriate options)

PREFIXES

____Z Prime Coated Steel*

____ZN D.C.C.I. Extended Ferrule w/ Polished Nickel Bronze Frame & Cover

*REGULARLY FURNISHED UNLESS OTHERWISE SPECIFIED

FUNCTION: Recommended for installation in conjuction with Oil Interceptors as a deep rough-in oil storage tank with access for oil removal.

REV. E DATE: 4/23/08 C.N. NO. 98394

DWG. NO. 63884 PRODUCT NO. Z1186-HT