




Z1172-137

LARGE CAPACITY GREASE INTERCEPTOR W/ EXTENSION & STAINLESS STEEL COVER

SPECIFICATION SHEET

TAG _____

Dimensional Data (inches and [mm]) are Subject to Manufacturing Tolerances and Change Without Notice

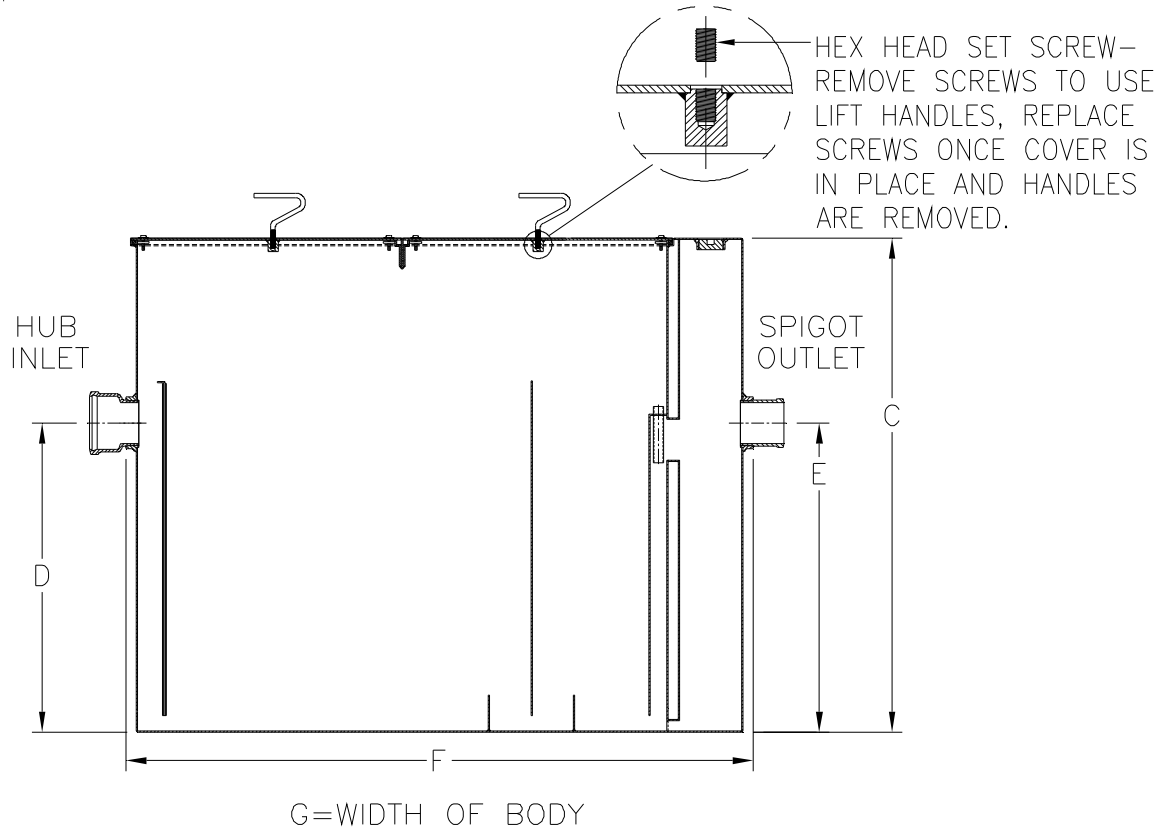

Size	Inlet/ Outlet Size**	Flow Rate G.P.M. [L]	Capacity		No. of Covers	Approx. Wt. Lbs. [kg]	Dimensions in Inches			
			Water Gal. [L]	Grease Lbs. [kg]			C	D/E	F	G
1300	4 [102]	200 [756]	270 [1021]	400 [182]	2	1016 [461]	47 7/8 [1216]	29 7/8 [759]	61 [1549]	43 5/8 [1108]

ENGINEERING SPECIFICATION: ZURN Z1172-137

Large capacity Acid Resistant Coated interior and exterior fabricated steel grease interceptor with integral extension, Hub inlet and Spigot outlet, rated at 200 [1021] GPM and 400 [182] Lbs. grease capacity, with internal air relief by-pass, bronze cleanout plug and visible double wall trap seal with removable pressure equalizing/flow diffusing baffle. Gasketed non-skid secured stainless steel covers with covered removable lift handles, complete with flow control fitting. Regularly furnished with inlet and outlet in high position.

OPTIONS (Check/specify appropriate options)

PREFIXES

___ Z Acid Resistant Coated Fabricated Steel*

SUFFIXES

___ -L Angle Type (Z1108-L) Flow Control Device.

REV.	DATE: 6/16/06	C.N. NO. 95225
DWG. NO. P-15297 PRODUCT NO. Z1172-137		

*REGULARLY FURNISHED UNLESS OTHERWISE SPECIFIED