




Z-100-145 15" DIAMETER MAIN ROOF DRAIN

TAG _____

Dimensional Data (inches and [mm]) are Subject to Manufacturing Tolerances and Change Without Notice

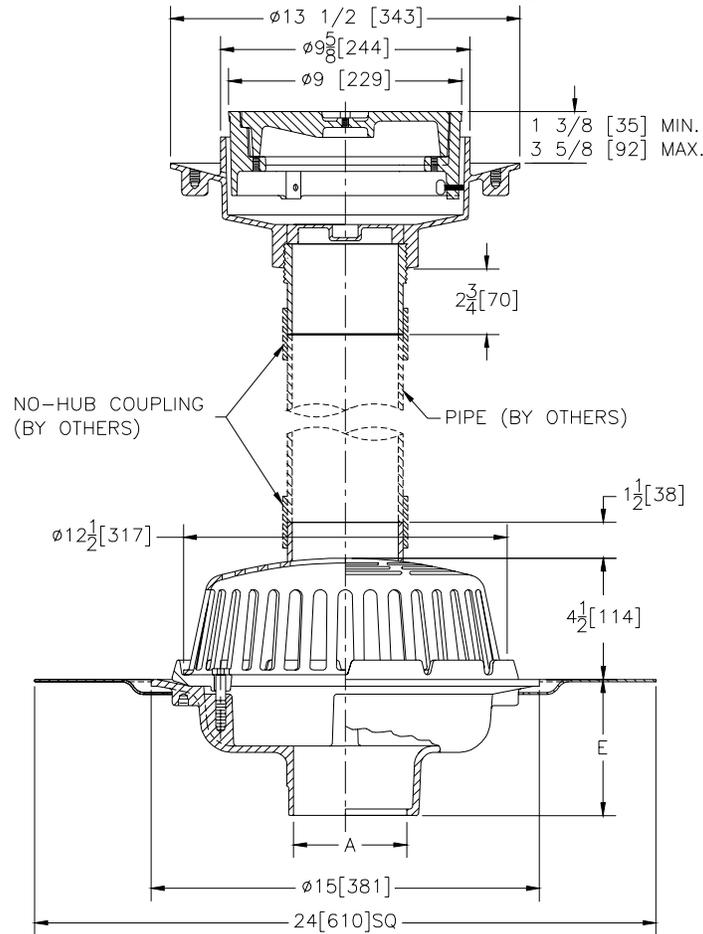

ENGINEERING SPECIFICATION: ZURN Z-100-145 15[381] Diameter roof drain. Dura-Coated cast iron body with combination membrane flashing clamp/ gravel guard, low silhouette dome, roof sump receiver in combination with upper floor cleanout, Dura coated cast iron body. gas and watertight ABS tapered thread plug, and round scoriated Dura-coated cast iron adjustable top, complete with membrane flashing flange.

A- Pipe Size In.	Approx. Wt. Lbs.[kg]
2,3,4 [50,75,100]	93 [42]
6 [152]	95 [43]

SUFFIXES

- _____ -BS Bronze Mesh Screen Over Dome
- _____ -E Static Extension 1[25] thru 4[100] (Specify Height)
- _____ -EA Adjustable Extension Assembly 1 3/4[44] thru 3 1/2[89]
- _____ -G Galvanized Cast Iron
- _____ -GD Galvanized Cast Iron Dome
- _____ -S Secondary Clamp Collar
- _____ -XJ Vertical Expansion Joint (See Z-190)

OPTIONS (Check/specify appropriate options)

PREFIXES

- _____ Z- D.C.C.I. Body Cast Iron*
- _____ ZB- D.C.C.I. Body with Polished Bronze Scoriated Top (Add 3/16 [5] to 1 3/8 [35] Min.-3 5/8 [92] Max.)
- _____ ZN- D.C.C.I. Body with Polished Nickel Bronze Scoriated Top (Add 3/16 [5] to 1 3/8 [35] Min.-3 5/8 [92] Max.)

OUTLET (Specify type)

- _____ IC Inside Caulk
- _____ IG Inside Caulk w/Sealtrol Gskt.
- _____ IP Threaded
- _____ NH No-Hub
- _____ NL Neo-Loc

PIPE SIZE (Specify size)

- _____ 2,3,4,6 [50,75,100,150]
- _____ 2,3,4,6 [50,75,100,150]
- _____ 2 thru 6 [50 thru 150]
- _____ 2,3,4,6 [50,75,100,150]
- _____ 2 thru 6 [50 thru 150]

'E' BODY HT. DIMENSION

- 5 1/4 [133]
- 5 1/4 [133]
- 3 3/4 [95]
- 5 1/4 [133]
- 4 5/8 [117]

*REGULARLY FURNISHED UNLESS OTHERWISE SPECIFIED

REV.	DATE: 9/5/97	C.N. NO. 78458
DWG. NO. P-14515		PRODUCT NO. Z-100-145