




Z1172-112

LARGE CAPACITY GREASE INTERCEPTOR

SPECIFICATION SHEET
TAG _____

Dimensional Data (inches and [mm]) are Subject to Manufacturing Tolerances and Change Without Notice

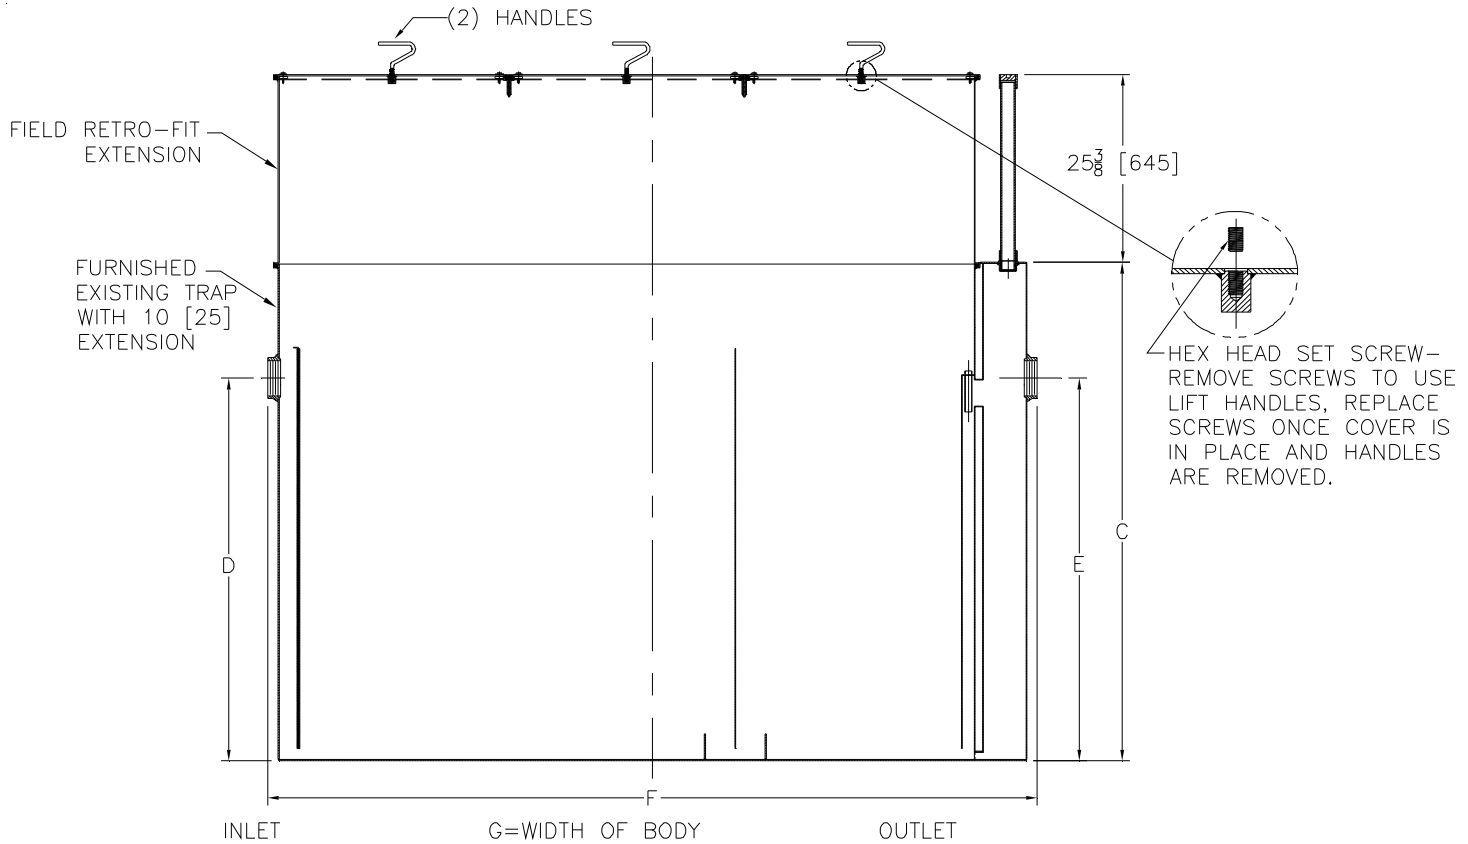

Size	Inlet/ Outlet Size**	Flow Rate G.P.M. [L]	Capacity		No. of Covers	Approx. Wt. Lbs. [kg]	Dimensions in Inches			
			Water Gal. [L]	Grease Lbs. [kg]			C	D/E	F	G
1900	6 [152]	500 [1890]	1440 [5443]	1000 [454]	3	2857 [1297]	67 1/4 [1708]	51 5/8 [1311]	104 [2642]	74 [1880]

ENGINEERING SPECIFICATION: ZURN Z1172-112

Large capacity Acid Resistant Coated interior and exterior fabricated steel grease interceptor, with 10 [25] integral extension, rated at ___ GPM and ___ Lbs. grease capacity with internal air relief by-pass, bronze cleanout plug and visible double wall trap seal, removable combination pressure equalizing/flow diffusing baffle, (3) gasketed non-skid secured covers with removable lift handles and enzyme port having bronze plug, complete with Z1108 flow control fitting. Acid resistant coated interior and exterior fabricated steel retro-fit extension section. Regularly furnished with inlet and outlet in high position.

OPTIONS (Check/specify appropriate options)

PREFIXES

___ **Z** Acid Resistant Coated Fabricated Steel*

SUFFIXES

- ___ **-HD** Heavy duty traffic cover rated at 10,000 lbs [4536] kg. maximum safe live load.
- ___ **-K** Anchor flange 1 3/4 [44] down from top and 2 [51] wide. No extension required to accommodate -K.
- ___ **-KC** Anchor flange 1 3/4 [44] down from top and 2 [51] wide with clamp collar.
- ___ **-L** Angle Type (Z1108-L) flow control device.

REV. A DATE: 08/06/07 C.N. NO. 97086

DWG. NO. P-14789 PRODUCT NO. Z1172-112

*REGULARLY FURNISHED UNLESS OTHERWISE SPECIFIED