



Z1186-ST-111


SIZE 700 OIL INTERCEPTOR

WITH 108 GALLON INTEGRAL STORAGE TANK

SPECIFICATION SHEET

TAG _____

Dimensional Data (inches and [mm]) are Subject to Manufacturing Tolerances and Change Without Notice

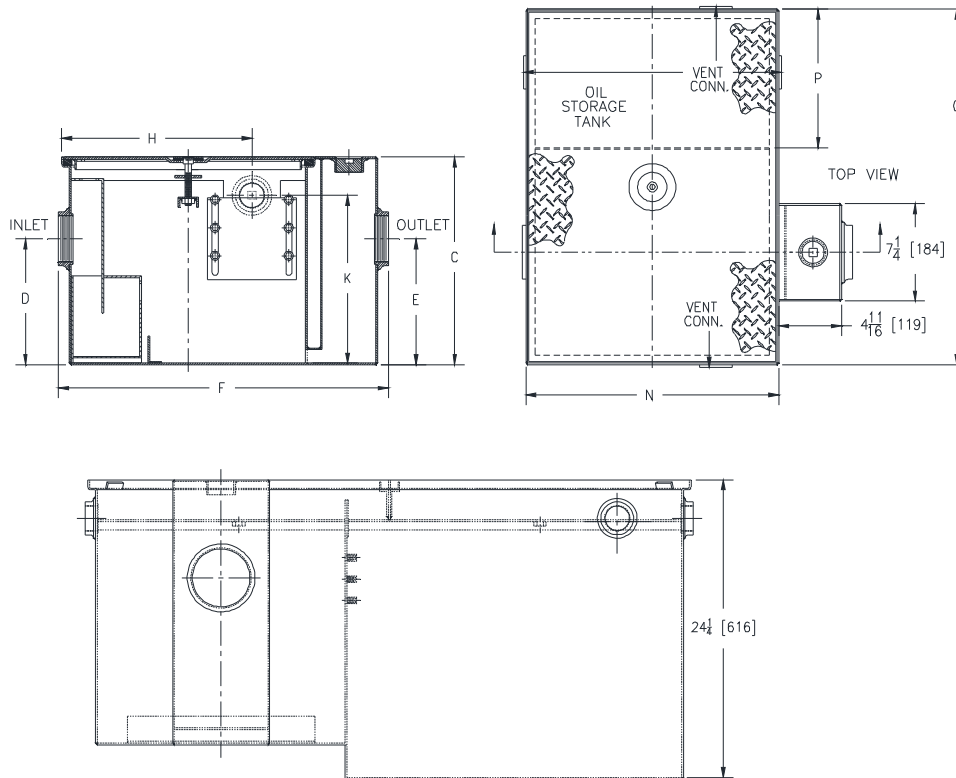

SIZE	Inlet/Outlet Size**	Flow Rate GPM.[L.P.M.]	Water Capacity Gal.[L]	Approx. Wt. Lbs.[kg]	P in [mm]
700	3 [76]	35 [132]	21 [79]	320 [145]	31-13/16 [808]

Dimensions in inches [mm]								Oil Storage Tank Capacity Gal.[L]	No. of Covers
SIZE	C	D/E	F	G	H	K	N		
700	19-3/4 [502]	12-7/16 [316]	43-7/16 [1103]	51-1/8 [1299]	23-1/4 [591]	16-3/4 [425]	37 [940]	108 [409]	3

ENGINEERING SPECIFICATION: ZURN Z1186-ST-111

Acid Resistant Coated interior and exterior fabricated steel oil interceptor, with bronze cleanout plug and visible double wall trap seal, removable combination pressure equalizing/flow diffusing baffle and sediment bucket, oil drawoff, vent connections, secured gasketed non-skid cover, complete with flow control fitting and left hand integral storage tank. Regularly furnished with inlet and outlet in high position. Note: location of outlet from bottom of interceptor cannot be changed.

OPTIONS (Check/specify appropriate options)

PREFIXES

_____ Z Acid Resistant Coated Fabricated Steel*

SUFFIXES

- _____ -E Acid Resistant Coated interior and exterior fabricated steel section. (Specify 'C' Dim. required) for recessed installation
- _____ -HD Heavy duty traffic cover rated at 10,000 lbs. maximum safe live load.
- _____ -K Anchor flange 1-3/4" [44mm] down from top and 2" [51mm] wide. A 3" [76mm] minimum extension height is required when anchor flange (-K) option is specified. (Specify 'C' Dim. height required.)
- _____ -KC Anchor flange 1-3/4" [44mm] down from top and 2" [51mm] wide with clamp collar.
- _____ -STR Storage tank on right hand side when facing the inlet.

* Regularly furnished unless otherwise specified.