


Z-100-107 15" DIAMETER ROOF DRAIN WITH STATIC EXTENSION AND VERTICAL EXPANSION JOINT

Dimensions Subject to Manufacturing Tolerances

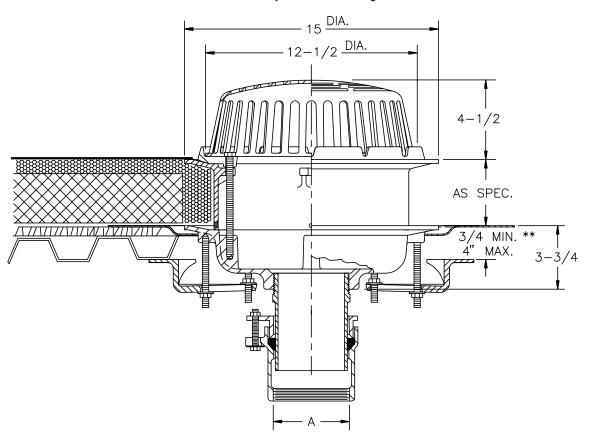

A- Pipe Size	Approx.	Dome Open Area
In.	Wt. Lbs.	Sq. In.
2-3-4	49	103

ENGINEERING SPECIFICATION: ZURNZ-100-C-E-G-R 15" Diameter roof drain. Galvanized cast iron body, static extension, roof sump receiver, under deck clamp, vertical expansion joint and combination membrane flashing clamp/gravel guard and low silhouette dome.

OPTIONS (Check/specify appropriate options)

 OUTLET
 PIPE SIZE
 (Specify size)

 _____ IP
 Threaded
 ______ 2" thru 4"

SHEELYES

SUFFIXES	
AC AW	Angular Underdeck Clamp 3/4" to 4" Adjustable Water Level Regulator
	(Previously Z-103-1)
BS	Bronze Mesh Screen Over Dome
DX	Dex-o-Tex Flange
EA	Adjustable Extension Assembly 1-3/4" thru 3-1/2"
S	Secondary Clamp Collar
SS	Stainless Mesh Screen Over Dome
VP W2	Vandal Proof Secured Top
w2	2" Internal Water Dam (Previously Z-103) 3" Internal Water Dam " "
W3	4" Internal Water Dam " "
84	Stainless Steel Perforated Gravel Guard
85	Stainless Steel Perforated Extension
89	2" High External Water Dam
	U DEV

REV. DATE: 1/3/92 C.N. NO. 67933

DWG. NO. P-13660 PRODUCT NO. Z-100-107

 ${}^*\!REGULARLYFURNISHED\,UNLESS\,OTHERWISE\,SPECIFIED$