
TAG

Dimensional Data (inches and [mm]) are Subject to Manufacturing Tolerances and Change Without Notice

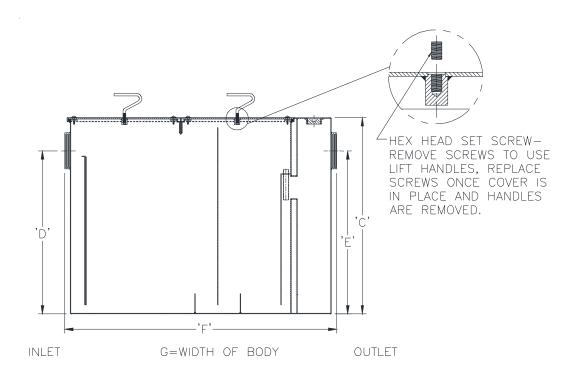

Size	Inlet/ Outlet Size	Flow Rate G.P.M. [L.P.M.]	Capacity		vers	Approx.	Dimensions in Inches [mm]			
			Water Gal. [L]	Grease Lbs. [kg]	No. of Co	Wt. Lbs [kg]	С	D/E	F	G
1400	6 [150]	250[946]	465 [1760]	500 [227]	2	1384 [628]	41 [1041]	36 [914]	71 [1803]	51-5/8[1311]

ENGINEERING SPECIFICATION: ZURN Z1172-186

Large capacity Acid Resistant Coated interior and exterior fabricated steel grease interceptor, rated at 250 GPM and 500 Lbs. grease capacity, with internal air relief by-pass, bronze cleanout plug and visible double wall trap seal with removable pressure equalizing/flow diffusing stainless steel baffle. Complete with gasketed non-skid secured cover with removable lift handles, and flow control fitting.

OPTIONS (Check/specify appropriate options)

PREFIXES Z ZS	Acid Resistant Coated Fabricated Steel* All Type 304 Fabricated Stainless Steel
SUFFIXES -AL -E	Aluminum Cover Acid Resistant Coated Interior and exterior fabricated steel extension section. (Specify 'C' Dim. required) for recessed installation.
	Heavy-duty traffic cover rated at 10,000 lbs. [4536 kg] maximum safe live load. Anchor flange 1-3/4 [44] down from top and 2 [51] wide.

Rev.

^{*} Regularly furnished unless otherwise specified.