




Z1185-121

LINT INTERCEPTOR W/8 [203] INLET/OUTLET

SPECIFICATION SHEET

TAG _____

Dimensional Data (inches and [mm]) are Subject to Manufacturing Tolerances and Change Without Notice

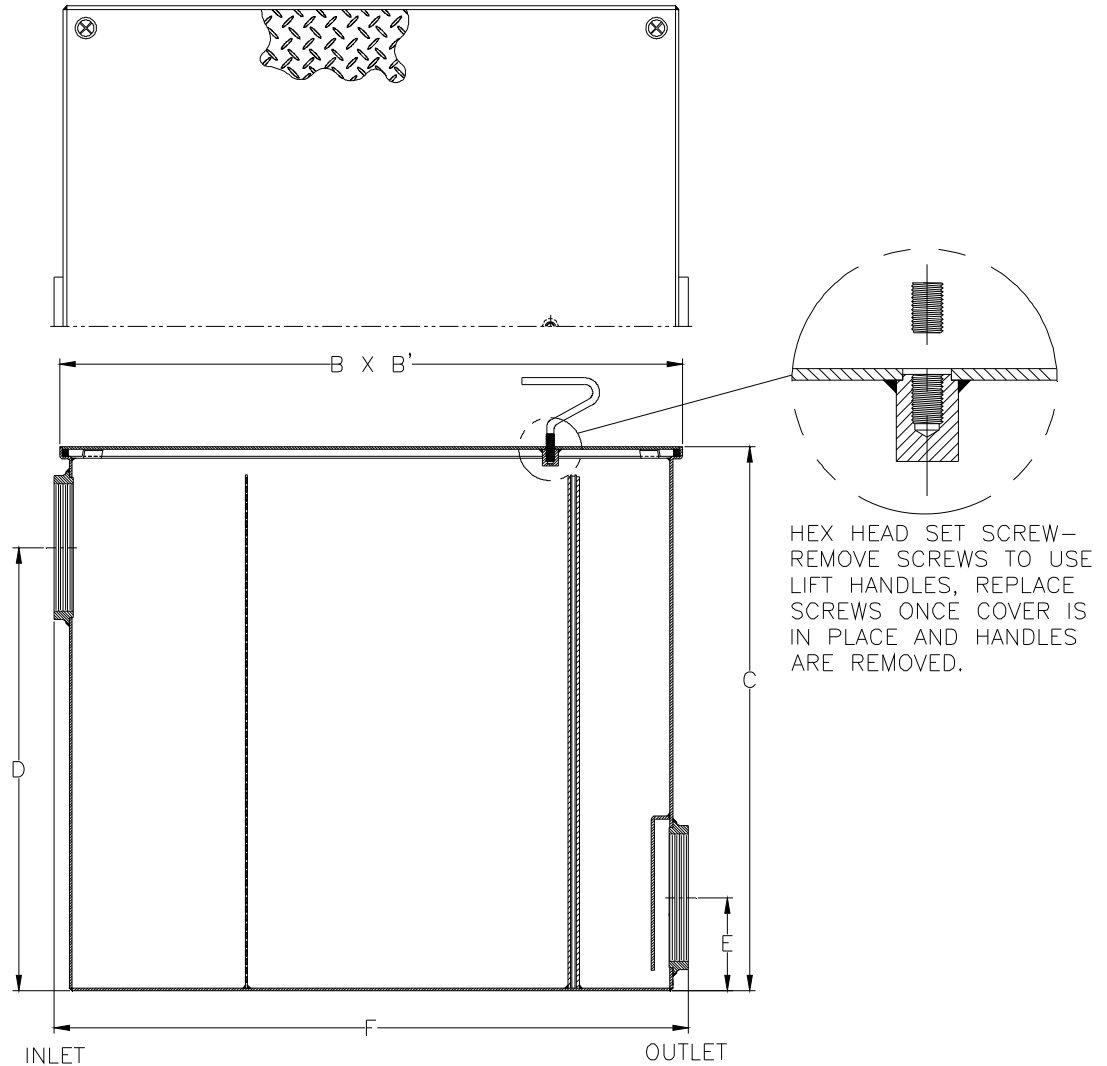

Size No. of Machines	Inlet/Outlet Size	Flow Rate G.P.M. [L]	Approx. Wt. Lbs. [kg]	Dimensions In Inches					
				B	B'	C	D	E	F
20	8 [203]	200 [756]	404 [183]	40 [1016]	40 [1016]	35 [889]	28 1/2 [724]	6 [152]	41 [1041]

ENGINEERING SPECIFICATION: ZURN Z1185-121 Acid Resistant Coated interior and exterior fabricated steel lint interceptor, non-skid secured cover, with stainless lint intercepting secondary screen assembly and permanent primary straining baffle. Regularly furnished with 8 [203] high inlet and low outlet.

OPTIONS (Check/specify appropriate options)

PREFIXES

____ Z Acid Resistant Coated Fabricated Steel*

SUFFIXES

____ -E Acid Resistant Coated interior and exterior fabricated steel extension section (Specify 'C' dimension required for recessed installation).

____ -RS Stainless Steel Screen Replacement Assembly

REV.	DATE: 10/30/09	C.N. NO. 110379
DWG. NO. P-15790		PRODUCT NO. Z1185-121

*REGULARLY FURNISHED UNLESS OTHERWISE SPECIFIED