




Z415B-82

BODY ASSEMBLY WITH "TYPE B" STRAINER & CLOSURE PLUG

SPECIFICATION SHEET

TAG _____

Dimensional Data (inches and [mm]) are Subject to Manufacturing Tolerances and Change Without Notice

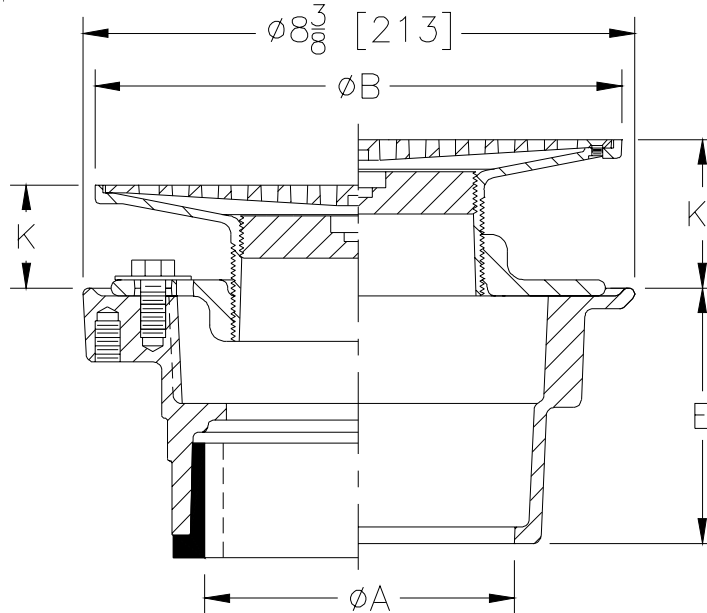

Dimensions In Inches						Approx. Wt. Lbs. [Kg.]	Strainer Open Area Sq. In. [Cm ²]
A Pipe Size	B Strainer Dia.	K		K'			
		Min.	Max.	Min.	Max.		
2-3 [51-76]	5 [127]	1/2 [13]	1 5/8[41]	1 3/8[35]	2 3/8[60]	11 [5]	8 [52]
2-3-4 [51-76-102]	6 [152]	3/4 [19]	1 3/4[44]	1 5/8[41]	2 3/4[70]	13 [6]	9 [58]
2-3-4 [51-76-102]	7 [178]	1 [25]	2 1/4[57]	2 [51]	3 1/8[79]	14 [6]	12 [77]
3-4 [76-102]	8 [203]	1 1/8[29]	2 1/4[57]	2 [51]	3 1/8[79]	16 [7]	18 [116]
6 [152]	8 [203]	1 1/8[29]	2 1/4[57]	2 [51]	3 1/8[79]	18 [7]	18 [116]
6 [152]	10[254]	1 5/8[41]	2 5/8[67]	2 5/8[67]	3 1/2[89]	22 [10]	26 [168]

ENGINEERING SPECIFICATION:
ZURN ZN415B-82 Floor and shower drain, Dura-Coated cast iron body with bottom outlet, combination invertible membrane clamp and adjustable collar with "TYPE B" polished nickel bronze strainer with closure plug.

OPTIONS (Check/specify appropriate options)

PIPE SIZE

- 2 thru 4 [51 thru 102]
- 2 [51]
- 3 [76]
- 4 [102]
- 6 [152]
- 2 thru 4 [51 thru 102]
- 2 thru 4 [51 thru 102]

(Specify type/size) **OUTLET**

- _____ IC Inside Caulk
- _____ IP Threaded
- _____ IP Threaded
- _____ IP Threaded
- _____ IP Threaded
- _____ NH No-Hub
- _____ NL Neo-Loc

'E' BODY HT.

- DIMENSION**
- 3 7/8 [98]
 - 2 3/8 [60]
 - 2 5/8 [67]
 - 2 7/8 [73]
 - 2 3/4 [70]
 - 3 7/8 [98]
 - 4 5/8 [117]

PREFIXES

- _____ ZB D.C.C.I. Body Assembly with Polished Bronze Top
- _____ ZN D.C.C.I. Body Assembly with Polished Nickel Bronze Top*
- _____ ZS D.C.C.I. Body Assembly with 6 [152] Dia. Stainless Steel Top

SUFFIXES

- _____ -AR Acid Resisting Epoxy Coated Cast Iron
- _____ -G Galvanized Cast Iron
- _____ -HD Heavy-Duty Slotted Grate (5 [127] & 6 [152] Only)
- _____ -P Primer Connection (Specify 1/2 [13] or 3/4 [19])
- _____ -TC Neo-Loc Test Cap Gasket (2 - 4 [51 - 102] NL Bottom Outlet Only)
- _____ -U 1 - 3 [25 - 76] High Extension Adapter
- _____ -VP Vandal-Proof Secured Top
- _____ -90 90° Side Outlet Body (2 [51] & 3 [76] Only)

*REGULARLY FURNISHED UNLESS OTHERWISE SPECIFIED

REV. B DATE: 02/20/04 C.N. NO. 91959
DWG. NO. P-14081 PRODUCT NO. Z415B-82

ZURN INDUSTRIES, INC. ♦ SPECIFICATION DRAINAGE OPERATION ♦ 1801 Pittsburgh Ave. ♦ Erie, PA 16514

Phone: 814/455-0921 ♦ Fax: 814/454-7929 ♦ World Wide Web: www.zurn.com

In Canada: ZURN INDUSTRIES LIMITED ♦ 3544 Nashua Drive ♦ Mississauga, Ontario L4V1L2 ♦ Phone: 905/405-8272 Fax: 905/405-1292