

Z1810-6B-KC

6[152] DIAMETER ROUND INDUSTRIAL FLOOR DRAIN WITH ADJUSTABILITY, ANCHOR FLANGE & CLAMP COLLAR

SP	EC	IFIC	ATI	ON	SH	EET

TAG

Dimensional Data (inches and [mm]) are Subject to Manufacturing Tolerances and Change Without Notice

Engineering Specification: ZURN Z1810-6B-KC

6" [152mm] Diameter, 18 gage, all type 304 (CF8) stainless steel round industrial floor drain with loose set anti-tilt medium-duty perforated grate, adjustable reinforced top frame with o-ring seal and securing clamp, anchor flange with seepage holes and clamp collar, perforated removable sediment bucket with lift handle, presloped bottom sump, and pre-pour stabilizing anchor tabs

Approx.	Grate Open	
Wt.	Area	
Lbs. [kg]	Sq. In. [cm²]	
6 [3]	5.8 [37]	

Options (Check/specify appropriate options)

Pipe Size (ØA)	(Specify size/type) Outlet			
2,3,4 [51,76,102]	BW	Butt-Weld (Sch. 10)		
2 3 4 [51 76 102]	NH	No-Hub		


Prefixes

Z Type 304 (CF8) Stainless Steel*
Type 316 (CF8M) Stainless Steel

Suffixes

www.zurn.com

SA	Stabilizer Assembly (Z1035)
SQ	Stabilizer Q-Deck (Z1035-Q)
-TS	Top Secured Grate
-2PT	2 [51] Stainless Steel P-Trap
3PT	3 [76] Stainless Steel P-Trap
-4PT	4 [102] Stainless Steel P-Trap

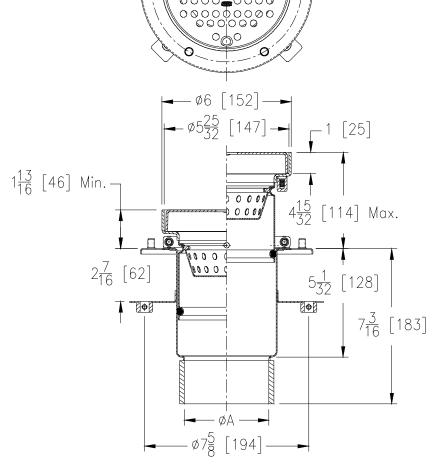

Dimensional data (inches and [mm]) are subject to manufacturing tolerances and change without notice.

Prod. | Dwg. No. Z1810-6B-KC