


Z1020-CW-DU4

SPECIFICATION SHEET

ELECTRONIC TRAP PRIMER W/ 4-OUTLET DISTRIBUTION UNIT AND COPPER WATERWAY

TAG _____

Dimensional Data (inches and [mm]) are Subject to Manufacturing Tolerances and Change Without Notice

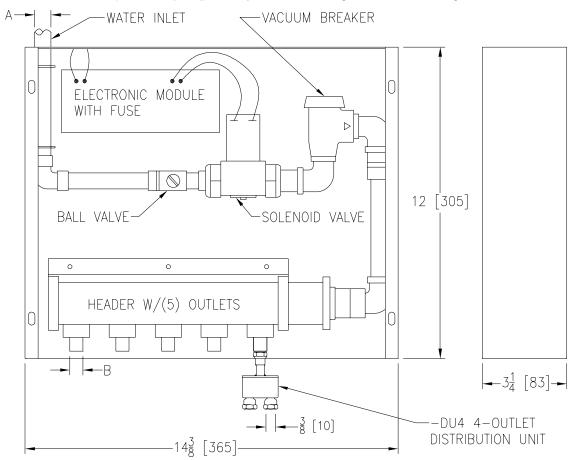

Dimensions in Inches		Approx. Wt. Lbs.
А	В	[kg]
1/2 [13]	1/2 [13]	12 [5]

ENGINEERING SPECIFICATION: ZURN Z1020-CW-DU4

Electronic trap primer programmed as standard to provide a six second water injection to traps every twenty-four hours*, complete with galvanized steel combination surface or recessed mount box and cover, 1/2 [13] solder copper inlet connection, brass ball type stop valve, slow closing 24 VAC solenoid valve with integral strainer, 120 - 24 VAC transformer, brass atmospheric vacuum breaker, copper waterway, and anti-scaling multi-port manifold with five 1/2 [13] Female I.P.S. outlet connections. () outlet(s) to be provided with -DU2 (2-Outlet Distribution Unit) for additional outlet connections.

Note: Distribution unit outlets are 3/8 N.P.T.

REV. DATE: 3/16/09 C.N. NO. 99816

DWG. NO. 84143 PRODUCT NO. Z1020-CW-DU4