




Z1185-128

#7 LINT INTERCEPTOR W/ 4" INLET AND OUTLET AND 2" VENT CONNECTIONS

TAG _____

Dimensional Data (inches and [mm]) are Subject to Manufacturing Tolerances and Change Without Notice

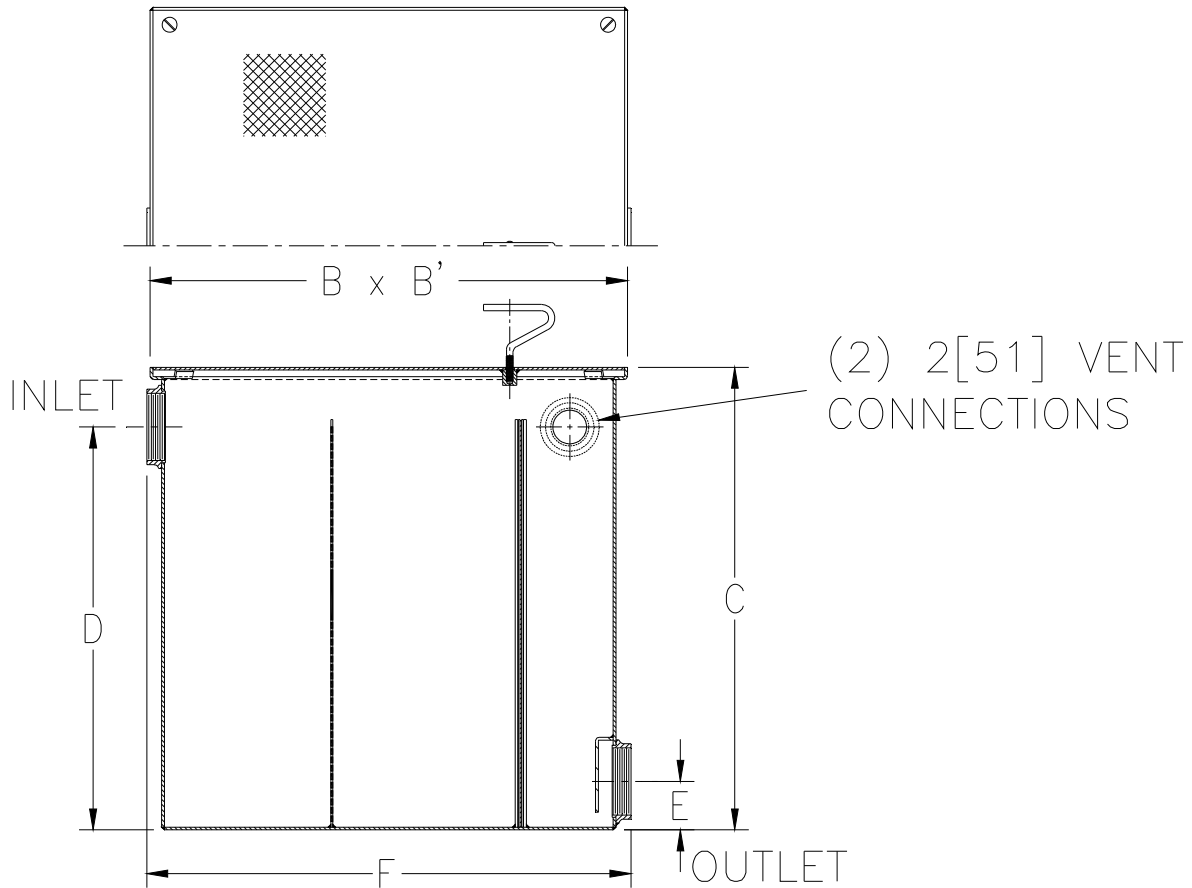

Size No. of Machines	Inlet/Outlet Size**	Flow Rate G.P.M. [L]	Approx. Wt. Lbs. [kg]	Dimensions In Inches					
				B	B'	C	D	E	F
7	4 [100]	70 [265]	155 [70]	25 [635]	25 [635]	20 [508]	17 [432]	4 [102]	25 1/2 [648]

ENGINEERING SPECIFICATION: ZURN Z1185-128 Acid Resistant Coated interior and exterior fabricated steel lint interceptor, 4" inlet/outlet with 2" vent connections on the left and right side, non-skid secured cover, with stainless lint intercepting secondary screen assembly and permanent primary straining baffle. Regularly furnished with high inlet and low outlet.

OPTIONS (Check/specify appropriate options)

PREFIXES

___ Z- Acid Resistant Coated Fabricated Steel*

SUFFIXES

___ RS- Stainless Steel Screen Replacement Assembly

REV.	DATE: 01/03/11	C.N. NO. 120710	
DWG. NO. 303862		PRODUCT NO. Z1185-128	

*REGULARLY FURNISHED UNLESS OTHERWISE SPECIFIED