


Z1187-E SAND AND SEDIMENT INTERCEPTOR

SPECIFICATION SHEET

TAG

Dimensional Data (inches and [mm]) are Subject to Manufacturing Tolerances and Change Without Notice

WITH INTEGRAL EXTENSION

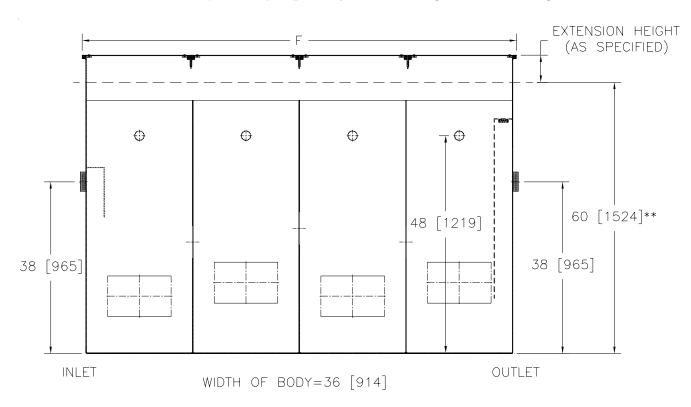

| Size | Cubic Ft. [cm] | Approx. Wt.Lbs. [kg] | F-Dim in Inches |
|------|-------------------|-------------------------|--------------------|
| 300 | 43 [1.2] | 1600 [726] | 60 [1524] |
| 400 | 54 [1.5] | 1750 [794] | 72 [1829] |
| 500 | 72 [2] | 2100 [953] | 96 [2438] |
| 600 | 81 [2.3] | 2500 [1135] | 108 [2743] |
| 700 | 90 [2.5] | 2700 [1226] | 120 [3048] |
| 800 | 108 [3] | 3000 [1362] | 144 [3658] |
| 1000 | 135 [3.8] | 3640 [1652] | 180 [4572] |

ENGINEERING SPECIFICATION: ZURN Z1187-E

Acid Resistant Coated fabricated steel sand and sediment separator, ___cu. ft. capacity below invert of outlet, 4 [102] threaded inlet and outlet, four 2 [51] threaded individual vent connections, integral extension, complete with heavy duty scoriated non-skid gasketed removable cover(s).

** Standard interceptor height for all sizes is 60 [1524]. Specify extension height and overall height required.

OPTIONS (Check/specify appropriate options)

PREFIXES

Z Acid Resistant Coated Fabricated Steel*

SUFFIXES

- ___ -K Anchor flange 1 3/4 [44] down from top and 2 [51] wide.
- _____ -HD Extra heavy duty reinforced cover for vehicular traffic. (Specify working load requirements)

REV. A DATE: 09/08/06 C.N. NO. 95556

DWG. NO. 62033 PRODUCT NO. Z1187-E

*REGULARLY FURNISHED UNLESS OTHERWISE SPECIFIED