
## Z1209-ND4-F VERTICAL OFFSET BACK-TO-BACK SIPHON JET SUPPORT SYSTEM FOR FLOOR-MOUNTED BACK **OUTLET FIXTURES**

SPECIFICATION SHEET

TAG

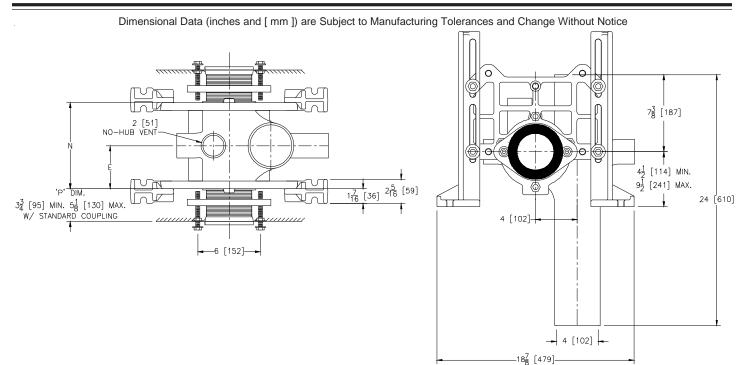

NOTE:

1. Min. 'P' dim. obtainable = 2 [51] with cut standard coupling.

Е

4-1/8 [105]

and back slots on carrier feet.

Dimensions in Inches [mm]

## ENGINEERING SPECIFICATION: ZURNZ1209-ND4-F

Back-to-back vertical offset siphon jet water closet "Rigid System" with 2. Feet bolted to floor using min. 1/2 [13] dia. anchors 4" [102mm] size no-hub connections and 2" [51mm] vent. Complete with Dura-Coated cast iron main fitting, separable faceplates rigidly mounted on fitting, universal floor mounted foot supports, corrosion resistant adjustable ABS coupling with integral test cap, fixture trim, stud protectors, bonded "Neo-Seal" gasket, and back outlet fixture supports.

**OPTIONS** (Check/specify appropriate options)

Z1209-ND4-F 4 [102] No-Hub Stack, Double Inlet, 2 [51] Vent

Ν

8-1/4 [210]

## PREFIXES

Product

No.

Z1209-ND4-F

Ζ D.C.C.I. System with Zurn "ZZ" Adjustable Coupling\* \_\_\_\_\_

## SUFFIXES

- -CC Corrosion Resistant Cast Iron Coupling (6 [152] to 12 [305])
- -CL Coupling Length Other than Standard 6 [152] (Specify Length Required)

Approx Wt.

Lbs. [kg]

110 [50]

- Two 2 [51] Auxiliary Inlets -JJ
- -JS 2 [51] Stack Side Auxiliary Inlet
- 2 [51] Vent Side Auxiliary Inlet -JV
- Auxiliary Foot Support (For 'P'-Dim. 10 [254] -18 [457]) -M
- -PF Pre-Fab Foot
- -PS **Pre-Fab Slotted Foot**
- -RYK Unistrut Pre-Fab Foot
- -VP Vandal Proof Trim

\* Regularly furnished unless otherwise specified.