




# Z1188-140

## 200 GPM OIL INTERCEPTOR W/ STORAGE TANK

SPECIFICATION SHEET

TAG \_\_\_\_\_

Dimensional Data (inches or [ mm ]) are Subject to Manufacturing Tolerances and Change Without Notice

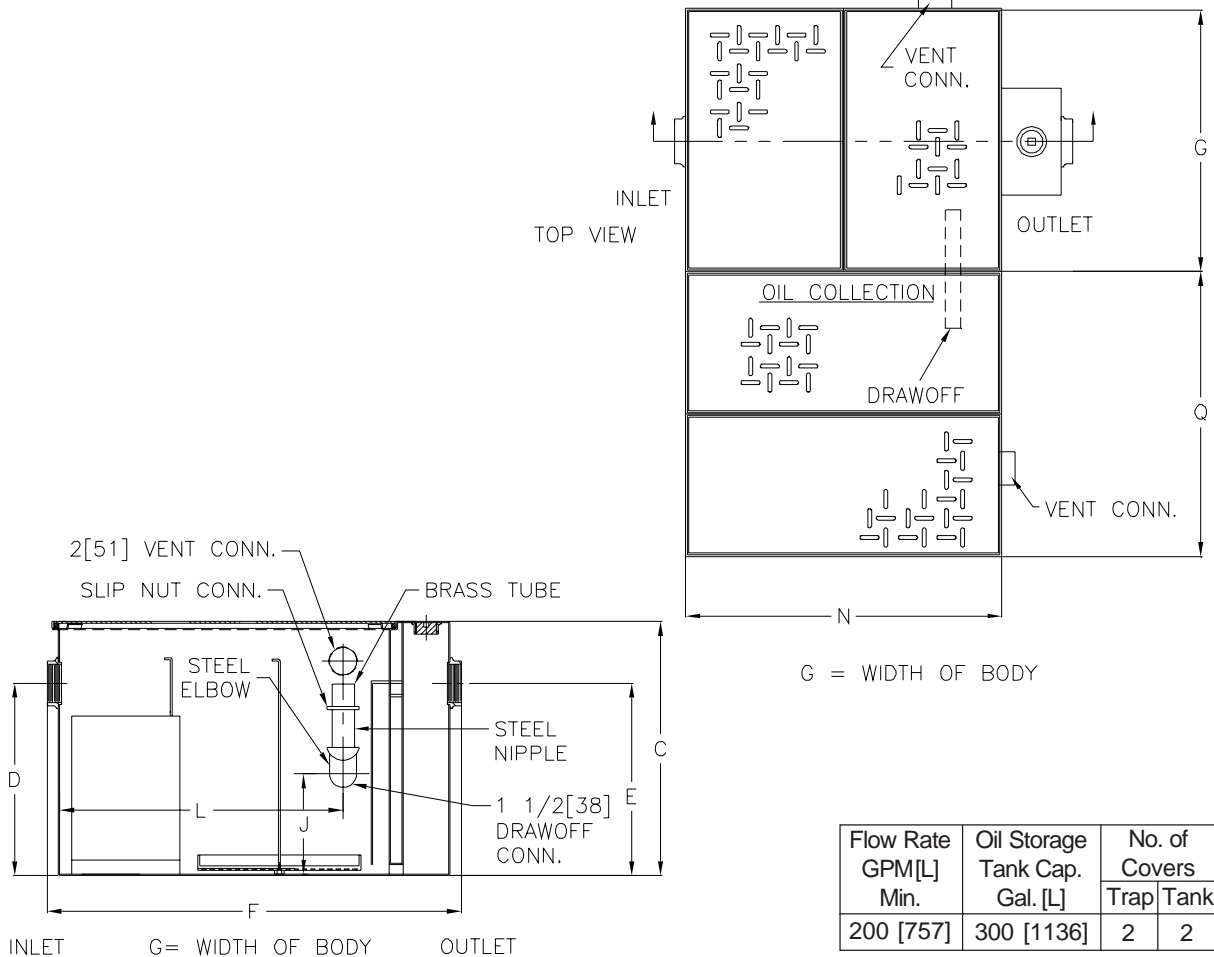

Flow Rate GPM[L] Min.	Oil Storage Tank Cap. Gal. [L]	No. of Covers	
		Trap	Tank
200 [757]	300 [1136]	2	2

Flow Rate GPM[L] Min	Inlet/ Outlet Size**	Water Capacity Gal. [L]	App. Wt. Lbs. [Kg]	Dimensions In Inches							
				C	D/E	F	G	J	L	N	Q
200 [757]	4 [102]	265 [1003]	1150 [522]	35 1/2 [902]	29 7/8 [759]	61 [1549]	43 5/8 [1108]	18 [457]	46 5/8 [1184]	51 1/8 [1299]	46 [1168]

**ENGINEERING SPECIFICATION:** ZURN Z1188-140 Large capacity Acid Resistant Coated interior and exterior fabricated steel oil interceptor, with bronze cleanout plug and visible double wall trap seal, removable combination pressure equalizing/flow diffusing baffle and sediment bucket, horizontal baffle, adjustable oil drawoff and vent connections. Secured gasketed non-skid cover complete with flow control fitting and integral storage tank. Regularly furnished with inlet and outlet in high position.

**OPTIONS** (Check/specify appropriate options)

**PREFIXES**

\_\_\_ Z Acid Resistant Coated Fabricated Steel\*

**SUFFIXES**

- \_\_\_ -E Acid Resistant Coated interior and exterior fabricated steel extension section. (Specify 'C' Dim. required) for recessed installation.
- \_\_\_ -HD Heavy duty traffic cover rated at 10,000 lbs [4536] kg. maximum safe live load.
- \_\_\_ -K Anchor flange 1 3/4 [44] down from top and 2 [51] wide. No extension required to accommodate -K.
- \_\_\_ -KC Anchor flange 1 3/4 [44] down from top and 2 [51] wide with clamp collar.

<b>REV.</b>	<b>DATE: 6/2/06</b>	<b>C.N. NO. 95168</b>
<b>DWG. NO. P-15278 PRODUCT NO. Z1188-140</b>		

\*REGULARLY FURNISHED UNLESS OTHERWISE SPECIFIED