


## 12" [305] DIAMETER HEAVY DUTY DRAIN WITH ADJUSTABLE EXTENSION, SUMP RECEIVER, AND UNDERDECK CLAMP

Z541-114

TAG

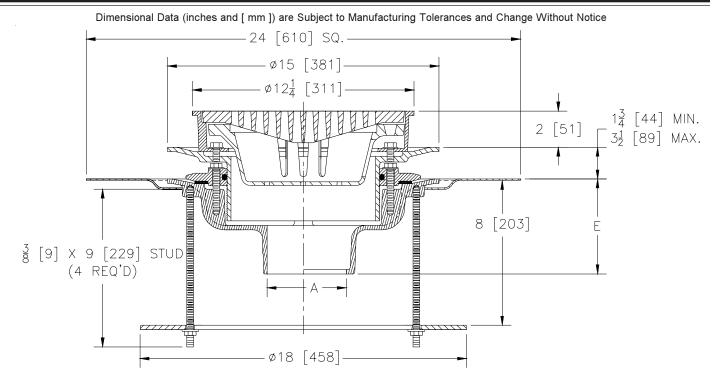

A- Pipe Size In.	Approx. Wt. Lbs. [kg]	Grate Open Area Sq. In. [cm²]
2-3-4-5-6 [50-75-100-125-150]	52 [24]	29 [187]
8-10 [200-250]	54 [24]	

Packing House Grate

\*REGULARLY FURNISHED UNLESS OTHERWISE SPECIFIED

Secondary Strainer

-PH

ENGINEERING SPECIFICATION: ZURN Z541-114 12" [305] Diameter top drain. Dura-Coated cast iron body with bottom outlet, seepage pan and combination membrane flashing clamp and frame for anti-tilt heavy duty slotted grate with suspended sediment bucket, adjustable extension, sump receiver, and underdeck clamp. **OPTIONS** (Check/specify appropriate options)

DATE: 6/17/03

DWG. NO. P-14989 PRODUCT NO. Z541-114

C.N. NO. 91064

**PIPE SIZE** (Specify size/type) OUTLET 'E' BODY HT. DIM. 2 thru 6, 8, 10 [50 thru 150, 200, 250] IC Inside Caulk 5 1/4 [133] 2 thru 6, 8, 10 [50 thru 150, 200, 250] IG Inside Caulk w/Sealtrol Gskt. 5 1/4 [133] 2 thru 6, 8, 10 [50 thru 150, 200, 250] IΡ Threaded 3 3/4 [95] 2 thru 6, 8, 10 [50 thru 150, 200, 250] No-Hub 5 1/4 [133] NH 2 thru 4 [50 thru 100] NL Neo-Loc 4 5/8 [117]

## **PREFIXES** Ζ D.C.C.I. Body and Grate\* ΖB D.C.C.I. Body with Polished Bronze Grate (Add 3/16 [5] to 2 [51] Dim.) D.C.C.I. Body with Polished Nickel Bronze Grate (Add 3/16 [5] to 2 [51] Dim.) ZΝ **SUFFIXES** -AR Acid Resisting Epoxy Coated Cast Iron -SS Stainless Mesh Liner for Bucket Dome Grate (D.C.C.I. only) -D -TG Tractor Grate **Duresist Grate** -DG -TS Top Secured with Slotted Screws -DX Dex-o-tex Flange Backwater Valve (See Z1099) -V Galvanized Cast Iron -G Vandal Proof Secured Top -H **Hinged Grate** Wide Slotted Grate (50 sq, in open) -WS -HP Heel-Proof Grate 90° Threaded Side Outlet Body (Less) Sediment Bucket -LY (2 thru 6 [50 thru 150]) Trap Primer Connection

REV.