




# Z1186-129 OIL INTERCEPTOR W/DRAW-OFF VALVE

SPECIFICATION SHEET

TAG \_\_\_\_\_

Dimensional Data (inches and [ mm ]) are Subject to Manufacturing Tolerances and Change Without Notice

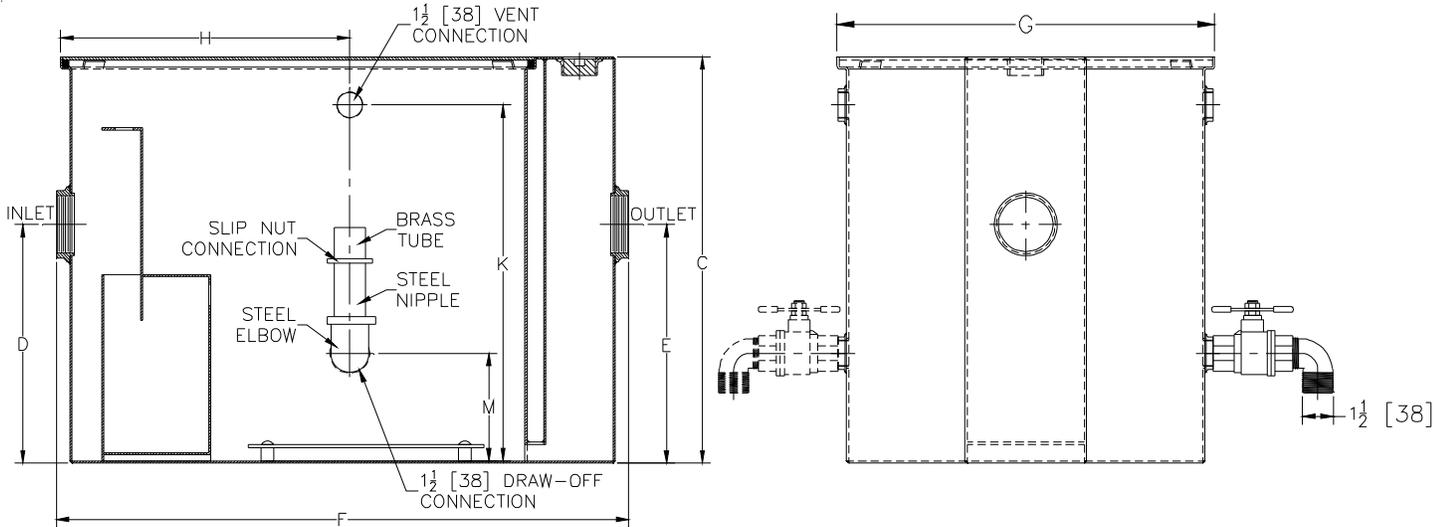

| Size | Inlet/<br>Outlet<br>Size ** | Flow<br>Rate<br>GPM [L] | Water<br>Cap.<br>Gal. [L] | Approx.<br>Wt.Lbs.<br>[kg] | Dimensions In Inches |              |              |              |              |              |              |
|------|-----------------------------|-------------------------|---------------------------|----------------------------|----------------------|--------------|--------------|--------------|--------------|--------------|--------------|
|      |                             |                         |                           |                            | C                    | D/E          | F            | G            | H            | K            | M            |
| 800  | 3 [76]                      | 50 [189]                | 30 [113]                  | 171 [78]                   | 24 1/4 [616]         | 14 1/4 [362] | 34 1/8 [867] | 22 1/2 [572] | 17 1/4 [438] | 21 1/4 [540] | 6 7/16 [164] |

**ENGINEERING SPECIFICATION:** ZURN Z1186-129 Acid Resistant Coated interior and exterior fabricated steel oil interceptor, bronze cleanout plug and visible double wall trap seal, removable combination pressure equalizing/flow diffusing baffle and sediment bucket, horizontal baffle, adjustable oil draw-off with valve and vent connections either side, secured gasketed non-skid cover, complete with flow control fitting. Regularly furnished with inlet and outlet in high position. Note: Location of outlet from bottom of interceptor cannot be changed.

**OPTIONS** (Check/specify appropriate options)

**PREFIXES**

\_\_\_\_\_ Z Acid Resistant Coated Fabricated Steel\*

\*\* Inlet and outlet sizes shown indicate standard operating sizes and flow control setting. Size #800 will have 4 [102] connections reduced to 3 [76] as standard.

|  |                |                 |
|--|----------------|-----------------|
| REV.                                   | DATE: 10/26/09 | C.N. NO. 110363 |
| DWG. NO. P-15785 PRODUCT NO. Z1186-129 |                |                 |

\*REGULARLY FURNISHED UNLESS OTHERWISE SPECIFIED