




Z1172-126

LARGE CAPACITY GREASE INTERCEPTOR W/ 1500 GALLON CAPACITY

SPECIFICATION SHEET

TAG _____

Dimensional Data (inches and [mm]) are Subject to Manufacturing Tolerances and Change Without Notice

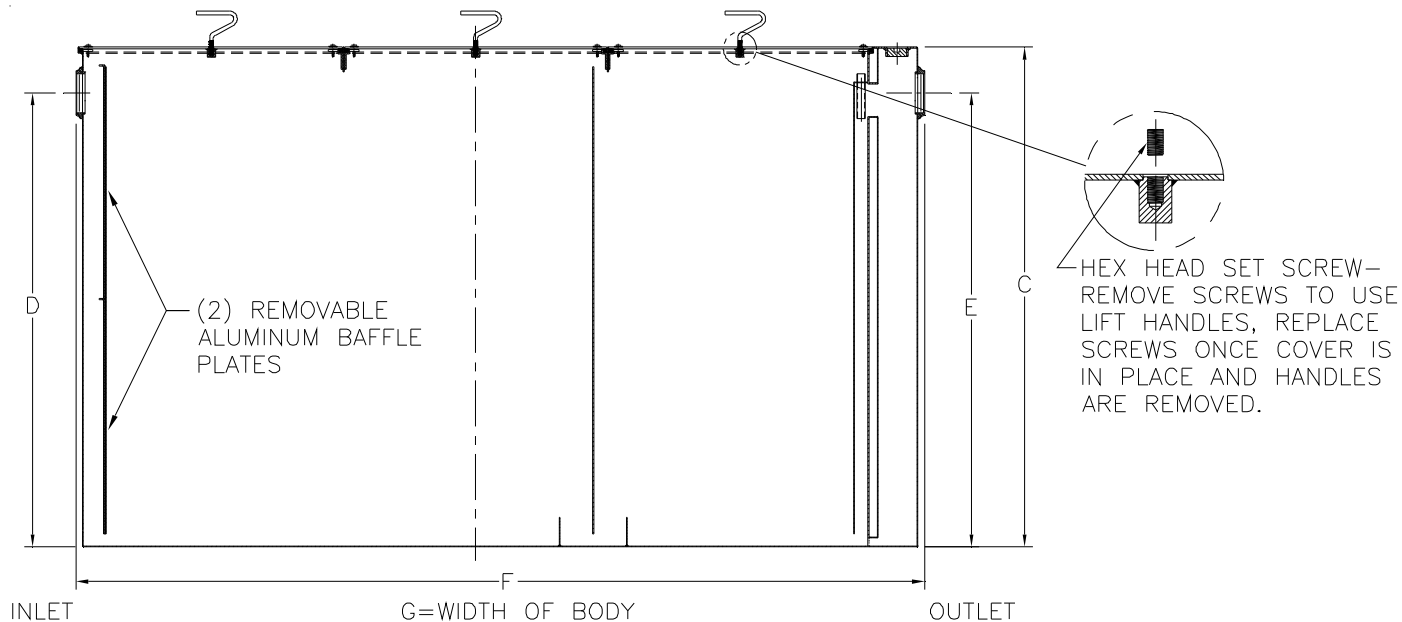

| Inlet/ Outlet Size** | Flow Rate G.P.M. [L] | Capacity | | No. of Covers | Approx. Wt. Lbs. [kg] | Dimensions in Inches | | | |
|----------------------------|----------------------------|-------------------|---------------------|------------------|-----------------------------|----------------------|---------------|------------|-----------|
| | | Water Gal. [L] | Grease Lbs. [kg] | | | C | D/E | F | G |
| 6 [152] | 500 [1890] | 1514 [5731] | 1000 [454] | 3 | 2981 [1352] | 61 1/4 [1556] | 55 5/8 [1413] | 104 [2642] | 74 [1880] |

ENGINEERING SPECIFICATION: ZURN Z1172-126

Large capacity Acid Resistant Coated interior and exterior fabricated steel grease interceptor, rated at ____ GPM and ____ Lbs. grease capacity, with internal air relief by-pass, bronze cleanout plug and visible double wall trap seal with removable pressure equalizing/flow diffusing two-piece aluminum baffle. Gasketed non-skid secured aluminum covers with removable lift handles, complete with flow control fitting. Regularly furnished with inlet and outlet in high position.

OPTIONS (Check/specify appropriate options)

PREFIXES

- ____ Z Acid Resistant Coated Fabricated Steel*
- ____ ZS All Type 304 Fabricated Stainless Steel

SUFFIXES

- ____ -E Acid Resistant Coated Interior and exterior fabricated steel extension section. (Specify 'C' Dim. required) for recessed installation.
- ____ -HD Heavy duty traffic cover rated at 10,000 lbs. [4536 kg.] maximum safe live load.
- ____ -K Anchor flange 1 3/4 [44] down from top and 2 [51] wide.
- ____ -KC Anchor flange 1 3/4 [44] down from top and 2 [51] wide with clamp collar.
- ____ -L Angle type (Z1108-L) flow control device.
- ____ -RE Acid Resistant Coated Interior and exterior fabricated steel recessing receiver enclosed type for recessed installation. Furnished with adjustable support brackets and gasketed non-skid covers with covered recessed lift handles.

| | | |
|-------------------------|------------------------------|-----------------------|
| REV. B | DATE: 04/29/08 | C.N. NO. 98417 |
| DWG. NO. P-15114 | PRODUCT NO. Z1172-126 | |

*REGULARLY FURNISHED UNLESS OTHERWISE SPECIFIED