




Z1187-SI-86

SAND INTERCEPTOR W/ 10 [254] INLETS AND OUTLETS AND EXTENDED BODY

SPECIFICATION SHEET

TAG _____

Dimensional Data (inches and [mm]) are Subject to Manufacturing Tolerances and Change Without Notice

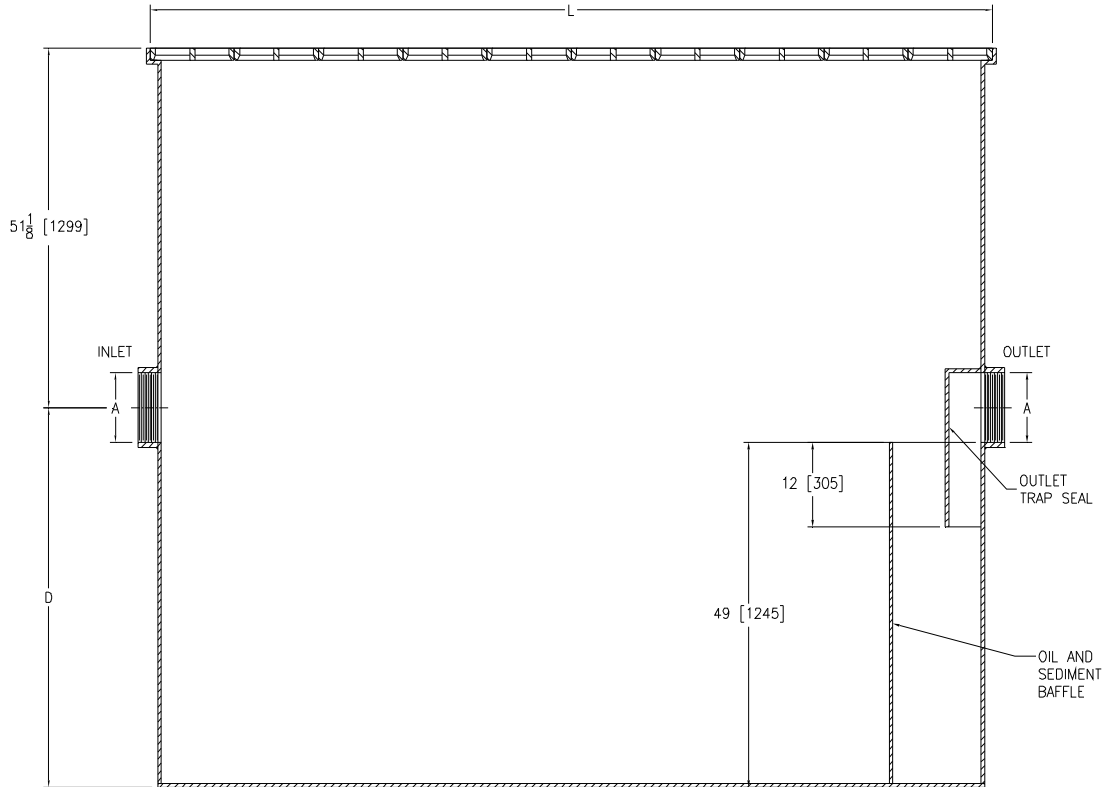

Size	Flow G.P.M. [L] (Max.)	A Pipe Size	L	D	Capacity Gal. [L] (Static)	No. of 12 x 24 [305 x 610] Grates	Width
500	500 [1893]	10 [254]	120 [3058]	54 [1372]	1220 [4618]	20	48 [1219]

ENGINEERING SPECIFICATION: ZURN Z1187-SI-86

Acid Resistant Coated interior and exterior fabricated steel sand interceptor with threaded inlet and outlet, complete with removable heavy-duty grates.

OPTIONS (Check/specify appropriate options)

PREFIXES

___ Z Acid Resistant Coated Fabricated Steel*

SUFFIXES

- ___ -DG Duresist Grate
- ___ -NH No-Hub Inlet and Outlet
- ___ -SC Extra-Heavy-Duty Reinforced Cover(s) for vehicular traffic. (Specify working load requirements)
- ___ -VP Vandal-Proof Screws

*REGULARLY FURNISHED UNLESS OTHERWISE SPECIFIED

REV.	DATE: 7/10/08	C.N. NO. 98748
DWG. NO. P-15565 PRODUCT NO. Z1187-SI-86		